



Architectural Binder Section NW Wood 540

GENERATION ™

Folding Glass Walls by NanaWall

NanaWall[®]
Boundaries **Unbound**[®]

Nana Wall Systems, Inc.
100 Meadowcreek Drive #250
Corte Madera, CA 94925

800 873 5673
415 383 3148
Fax 415 383 0312

info@nanawall.com
nanawall.com

r7-0324

NW Wood 540—Generation 4 Folding Glass Wall by NanaWall in Solid Wood

NW Wood 540, part of the Generation 4 Folding Glass Walls by NanaWall product family, provides the slimmest wood frame in the folding door industry. With a quadruple laminated cross-grained wood frame profile styled in a subtly rounded design, the intersection of two folding panels is a mere 5 11/16" (144 mm). Comprised of a host of proprietary and patented features, this floor supported system offers an extremely streamlined appearance with minimal exposed hardware, creating a new level of aesthetics.

With floor supported wood framed panels capable of reaching impressive system heights up to 9' 10" (3000 mm) and panel widths up to 3' 3" (1000 mm), this folding glass wall offers the possibility of wider opening sizes with the integration of FourFold and SixFold Panel Sets that move and stack to either side of the opening. NW Wood 540 provides the ultimate in layout flexibility. As a custom-built architectural solution, this system is available in inswing or outswing configurations and can accommodate open corner designs.

The best-in-class NW Wood 540 is designed for energy efficiency and strong weather performance. This system provides exceptional protection from outside elements and delivers comfort and security when closed. As a NanaWall product, the NW Wood 540 has been put through rigorous independent performance testing for air, water, structural, operation, and forced entry.

Minimal Sightline for a Modern Aesthetic

Panel frames are slim and attractive with a total 5 11/16" (144 mm) junction where the two adjacent folding vertical stiles meet. The panel profiles offer a smooth and subtly rounded design. Top and bottom rails are a minimal 3 1/4" (82 mm), along with stiles as thin as 2 5/8" (67 mm), provide slim-line aesthetics. Panel depth is 3 3/8" (86 mm). To coordinate with design programs, simulated divided lites, horizontal and vertical mullions are possible.

Quadruple Laminated Cross-Grained Wood for Added Strength

NW Wood 540 is built with quadruple laminated cross-grained solid premium wood to achieve the tall, slim-framed panel design of this fourth generation wood system. The quadruple-layer laminated wood allows for larger panel sizes, creates structural integrity, and provides long-term durability. Unlike other systems on the market, NanaWall wood framed systems are built on solid single-species wood

frames and are not veneered over inferior wood. This allows for maintenance sanding and refinishing down the road that will not compromise the beautiful wood finish. NW Wood 540 is manufactured with sustainably harvested wood. The wood options meet the international standards of PEFC.

Unique Gothic Arch Roller Design Provides Frictionless Smooth Operation

The bottom rollers run on two stainless steel wheels with a unique Gothic arch design supported by a double row of encapsulated and self-lubricating ball bearings. With a 2-point contact of each wheel to the floor track, the system glides quietly and smoothly with less friction by providing an equal distribution of weight on the stainless steel track.

The rollers run above the water table, visible during operation and concealed between the panel profiles when the system is closed. This proprietary design allows for continued long-term smooth operation and has been (internally) tested to 20,000 opening and closing cycles in accordance with DIN/EN 1191.

Floating Left/Right FourFold or SixFold Panel Sets for Wider Openings and Flexible Stacking Placement

NW Wood 540, along with the Generation 4 Folding Glass Walls by NanaWall product family, is the only floor supported, thermally broken folding system available that allows for larger opening sizes and flexible space management with the integration of FourFold or SixFold Panel Sets. These panel sets can move and stack either to the right, left, or center within the same track allowing the panels to be stacked in the most convenient location as needed. Additionally, the panels may be partially opened and located to control traffic flow or utilized to protect areas that are exposed to excessive wind.

NW Wood 540 Floor Supported Technology Reduces Structural Requirements

Floor supported systems are ideal for applications where load-bearing capability of the header is a concern.

The benefits of floor supported are:

Reduced Structural Requirements

- Control construction costs. NanaWall Floor Supported Technology requires less header load and limits the need for extensive pre-cambering.

- Improves the likelihood of keeping existing header when retrofitting/remodeling thus reduced construction costs—as long as the maximum deflection is the lesser of a 1/4" or L/720.

Long-term Durability and Smooth Operation

- Floor supported systems are durable and offer smooth operation with stainless steel wheels on a stainless steel track.

Three Sill Options with High Heel Resistant Feature

NW Wood 540 has three sill options: Performance, Low Profile Saddle, and Low Profile Saddle with UniverSILL® (Patent No. US011174673B2). Standard to all sills is removable aluminum high heel resistant sill inserts. These inserts provide ADA compliance for the Low Profile Saddle sill and create a very barefoot-friendly transition. Furthermore, the inserts offer protection from dirt and debris collecting in the bottom track. A lighted option is possible; LED rope lights by others may be run under the sill insert to illuminate the way.

Swing Doors for Traffic Management

To accommodate traffic flow, swing panels can be added either to the end of a chain of panels for systems with an odd number of panels folding in one direction or hinged to the side jamb, depending on unit height and configuration.

Please reference the NW Wood 540 size charts.

NW Wood 540 allows for an up to 3' 3" (1000 mm) wide swing panel hinged to the side jamb. Swing panels have been tested and passed over 500,000 cycles and can be optionally outfitted with higher kickplates for ADA compliance. Panic hardware and top door closers by others are possible.

Concealed Panel Alignment Means Less Exposed Panel Hinges

The patented (Patent No. US10711510B2) TwinX mechanism aligns panels of over 7' (2150 mm) in height by adding a hidden spring-loaded structural reinforcement feature without the need for an additional exposed hinge in the middle of the system. TwinX interlocks the panels together when the system is closed providing a consistent seal between the panels, specifically engineered to meet higher wind loads. This unique feature provides a clean-lined, sleek, and uniform appearance to the system.

Multipurpose Frame Insert Provides Continuous Surface at Side Jamb and Head Track

Standard to the system is a black polyamide clip-on multipurpose frame insert that conceals all visible frame-to-structure attachment points and screw heads to create a clean, even appearance. Additionally, this frame cover piece creates a hollow space to run and guide concealed cabling for the NW Wood 540 to connect to a home security system by others.

System Width Adjustment Feature for Long-term Tight, Consistent Sealing

System width adjusts with ease. To allow for construction tolerance, a patented (Patent No. US10683688B2) lateral adjustment feature of +/- 3/16" (5 mm) is available at the side jamb. This allows for consistent seal compression within the system and can be adjusted should the need arise. This adjustment feature is located so that it doesn't interfere with the continuous perimeter seal of the frame.

Anti-tilt Feature For Dynamic Stacking of Panel Sets

Each floor supported FourFold or SixFold Panel Set is outfitted with a proprietary engineered anti-tilt feature in the head track. This feature assures that the floating panels stack neatly and securely when in open formation. Panels may stack either to the right side, left side, or anywhere within the opening.

Installation Mounting Plate for Optimal Load Transfer

Stainless steel installation plates provide optimal load transfer reducing the number of screws required for mounting the system's frame. Each installation plate is backed with a sealing cushion to avoid bridging the thermal break and spreads the load of the screw head over a larger surface area resulting in fewer fixing points needed. These plates create a clean, finished look.

Optional Advanced Security Mechanism

For applications requiring state-of-the-art-security, an optional lock monitoring system with Reed contacts is available located within the head track. A special concealed locking mechanism end cap, in combination with the concealed Reed contact, creates an open or closed loop for the home security system supplied by others. These optional locking features can be concealed cable routed through the frames to a home security system. Additionally, the Reed contact can be connected to a service/maintenance system by others that counts the number of opening and closing cycles of the unit advising when it may be time to contact a service technician for routine maintenance.

Concealed Locking for Clean Appearance

Standard to the system is concealed locking between folding panels that operates with a 180° turn of a flat handle. The top and bottom locking bolts have approximately a 1" (24 mm) throw for maximum security engagement into the head and floor track.

Standard and Tested Locking Option on Primary Swing Panels:

1. Multipoint locking operated by lever handles and with European profile cylinder. Locking is independently tested for air, water, structural load performance, and forced entry.

Non-standard Commercial Locking Options on Primary Swing Panels (no air, water, or structural load values for primary swing panel):

1. Deadbolt lock(s) and push/pull handles and key/key European profile cylinder on both sides. Only recommended for end swing panel with door closer by others.

Standard and Tested Locking Option for Secondary Swing Panels:

1. Concealed edge lock with top and bottom locking bolts have approximately a 1" (24 mm) throw for maximum security engagement into the head and floor track. Locking is independently tested for air, water, structural load performance, and forced entry.

For additional hardware options, contact NanaWall.

Handles

Stainless Steel Lever Handles

Stainless steel lever handles and escutcheon plates for the standard multi-point locking are available either in brushed satin or black titanium finish.

Stainless Steel Flat Handles

Stainless steel flat handles are available either in brushed satin or black titanium finish.

Spring-Loaded Pull Handle

For outswing units with larger panel sizes, a spring-loaded pull handle is supplied for ease of closing the system. The pull handle is located above the flat handle. When not in use, the handle lays flat against the adjacent panel and is supplied with bumpers to avoid metal-to-metal contact. Handles are either silver or black titanium stainless steel with the attachment to coordinate with the hinge hardware of the system.

System Sizes

Depending on the desired glazing of the unit, maximum panel sizes range. For double or triple glazed systems, units can reach heights of 9' 10" (3000 mm) and panel widths up to 3' 3" (1000 mm). Unlimited system widths are possible with the addition of unhinged FourFold or SixFold Panel Sets.

Thermal Efficiency and Glazing Options

A fundamental benefit of this Generation 4 folding glass wall is energy efficiency. The solid wood frames also offer the additional insulative and thermal advantage provided by natural wood. Depending on glass type selection, NW Wood 540 offers exceptional thermal performance values as low as ".19". The system comes standard with continuous seals along the face of each panel frame.

The glass pocket can accommodate glass from 1 1/8" (28 mm) to 1 7/8" (48 mm) insulated glass.

Florida Product Approval

NW Wood 540 for all panel sizes and configurations is Florida statewide approved with Product Approval number FL41107. This approval includes inswing, outswing, and cornerless units.

Finishes







NW Wood 540 is available in PEFC certified Sapeli Mahogany, European Pine, and Meranti. Other specialty wood options are available upon request. Market availability of quadruple laminated cross-grained wood may differ by wood species.

Eco-friendly water-based pre-treatment is applied to each solid wood framed folding system to be field finished by others. Please request our Wood Finish booklet to review the wood options.



Performance Sill

NW Wood 540

| TYPE OF TEST | INWARD OPENING UNITS | | OUTWARD OPENING UNITS | |
|---|--|--|---|--|
|  Air Infiltration ^① ASTM E-283, ft ³ /min./ft. and NFRC 400 | @ 1.57 psf (75 Pa): 0.06 (0.06 exfiltration) A3 ^② | | @ 1.57 psf (75 Pa): 0.06 (0.06 exfiltration) A3 ^② | |
| | @ 6.24 psf (300 Pa): 0.14 | | @ 6.24 psf (300 Pa): 0.14 | |
|  Water Penetration ^{①*} ASTM E-547 and E-331 | No uncontrolled water entry ^① @ 9 psf (450 Pa) Please contact NanaWall for more information when higher water ratings are necessary. | | | |
|  Structural Load ^① ASTM E-330; pass See design windload charts for other sized panels <i>Note that the structural test pressures were 50% higher than the design pressures shown.</i> | DESIGN PRESSURE | | DESIGN PRESSURE | |
| | Positive @ 39 psf (1850 Pa) | Negative @ 55 psf (2670 Pa) | Positive @ 55 psf (2670 Pa) | Negative @ 39 psf (1850 Pa) |
| | Uniform Load Deflection, L/175 @ 45 psf (2150 Pa) Class CW-PG35 - FLD 4000 x 2600 | | Uniform Load Deflection, L/175 @ 45 psf (2150 Pa) Class CW-PG35 - FLD 4000 x 2600 | |
|  Forced Entry Resistance ^① AAMA-1304 | In accordance with AAMA-1304 requirements | | | |
|  Operating Force ^① ASTM E-2068 | The NW Wood 540 meets: <ul style="list-style-type: none"> Swing Panel: Open 1 lbf (2.8 N) & Close 1 lbf (3.9 N) Folding Panels: Initiate Motion - Open 4 lbf (20 N) & Close 3 lbf (15 N) Folding Panels: Maintain Motion - Open 1 lbf (3 N) & Close 1 lbf (4 N) | | | |
|  Operation / Cycling Performance AAMA 920 & DIN EN 1191 Windows and Pedestrian Doors - Mechanical Durability | The NW Wood 540 meets: <ul style="list-style-type: none"> "AAMA 920" requirement for swing panel attached to side jamb: 500,000 cycles - Pass German "DIN EN 1191/12400 Classification," where a unit is tested after 20,000 opening and closing cycles and is still functional | | | |

① Excerpts of results of 13' 1" W x 8' 6" H (4000 mm x 2600 mm) 4 panel unit (1L3R configuration) specific or equivalent to lab tested by Intertek Building & Construction, an independent testing laboratory in March 2020 per AAMA/WDMA/CSA 101/I.S.2/A440-17, NAFS-17 - North American Fenestration Standard

② For Canada, tested to NAFS-17 or equivalent and CSA A44051-09 (for drainage of standing water, weep hole in sill by others).

* Water rating may not be applicable for configuration not tested, especially even panels plus even panels configurations.



Thermal Performance

NW Wood 540 ^③ - Rated, certified, and labeled in accordance with NFRC 100 + 200

| TYPE OF GLASS (1 LITE) ^④ | CENTER OF GLASS U-FACTOR | INWARD OPENING UNITS | | | | OUTWARD OPENING UNITS | | | |
|--|--------------------------|----------------------|-------------------|-----------------|------------------|-----------------------|-------------------|-----------------|------------------|
| | | UNIT U-FACTOR | SHGC ^⑤ | VT ^⑥ | 2015 ENERGY STAR | UNIT U-FACTOR | SHGC ^⑤ | VT ^⑥ | 2015 ENERGY STAR |
| Double IG Clear (air filled) | .48 | .44 | .51 | .55 | - | .45 | .51 | .55 | - |
| Double IG Standard Low E (argon filled) | .25 | .29 | .23 | .47 | * | .29 | .23 | .47 | * |
| Double IG Standard Low E (air filled) | .30 | .32 | .23 | .47 | - | .33 | .23 | .47 | - |
| Triple IG Low E x 2 (argon filled) | .12 | .19 | .20 | .37 | * | .20 | .20 | .37 | * |
| Triple IG Low E x 2 (air filled) | .15 | .21 | .20 | .37 | * | .22 | .20 | .37 | * |
| Double IG Alternate Higher SHGC Low E (argon filled) | .25 | .29 | .33 | .48 | ** | .29 | .32 | .48 | ** |
| Double IG Alternate Higher SHGC Low E (air filled) | .29 | .32 | .33 | .48 | - | .33 | .32 | .48 | - |

NOTES

③ U-Factor, SHGC, & VT for NW Wood 540 system unhinged panels will be about the same except in some cases variations of +/- .01 from what is shown.

④ NFRC simulated U-factors of units with a horizontal mullion will have values of about .01 to .02 higher than units with no horizontal mullion. Please contact NanaWall for details.

⑤ SHGC = Solar Heat Gain Coefficient
⑥ VT = Visible Transmittance

* 2015 Energy Star Qualification Criteria: U-Factor for doors in all climate zones ≤.30, SHGC ≤.25 in South/South Central zones, and ≤.40 in North/North Central zones. (For guidance only. NanaWall is not a participant of the Energy Star program.)

** Meets SHGC Energy Star Qualification criteria for North/North Central zones only.

Shown above are thermal values for select glass options only. Thermal values for many other glass options are available. These may be able to meet specific requirements, such as Energy Star values for other zones, CA Title 24 prescriptive values, other state and local energy codes, etc. Thermal values for glass with other Low E coatings and Suntuitive dynamic glass are available. Please contact NanaWall for more information.

Low Profile Saddle Sill NW Wood 540

| TYPE OF TEST | INWARD OPENING UNITS | | OUTWARD OPENING UNITS | |
|--|--|--|---|--|
|  Air Infiltration ^① ASTM E-283, ft ³ /min/ft. and NFRC 400 | @ 1.57 psf (75 Pa): 0.11 (0.13 exfiltration) A2 ^② | | @ 1.57 psf (75 Pa): 0.13 (0.11 exfiltration) A2 ^② | |
| | @ 6.24 psf (300 Pa): 0.28 | | @ 6.24 psf (300 Pa): 0.25 | |
|  Water Penetration ^{①*} ASTM E-547 and E-331 | No uncontrolled water entry ^① @ 5.43 psf (260 Pa) | | | |
| | Subject to the following adaptations of the sill in the field by others: 1. Remove the gaskets covering the inner channel. 2. Drill weep holes through the bottom of the channel and drill weep holes from the middle channel to the exterior bottom hollow in sill (about one 5/16" weep hole per panel). 3. Drill weep holes through the lower front face of sill to the inner channel bottom (3/8" weep hole per panel). Please note that due to the varying site requirements and conditions, these sills will not be prepared for drainage by NanaWall. If this drainage system is desired, we recommend that qualified professionals construct this system on the project site strictly in accordance with instructions provided by NanaWall and in accordance with good waterproofing techniques, if drain connections are not made or not possible, unit may leak with wind driven rain. | | | |
|  Structural Load ^① ASTM E-330; pass See design windload charts for other sized panels <i>Note that the structural test pressures were 50% higher than the design pressures shown.</i> | DESIGN PRESSURE Positive @ 40 psf (1945 Pa) | | DESIGN PRESSURE Negative @ 45 psf (2150 Pa) | |
| | Uniform Load Deflection, L/175 @ 49 psf (2380 Pa) Class CW-PG35 - FLD 4000 x 2600 | | Positive @ 45 psf (2150 Pa) | |
| | | | Negative @ 40 psf (1945 Pa) | |
| | Uniform Load Deflection, L/175 @ 52 psf (2520 Pa) Class CW-PG35 - FLD 4000 x 2600 | | | |
|  Forced Entry Resistance ^① AAMA-1304 | In accordance with AAMA-1304 requirements | | | |
|  Operating Force ^① ASTM E2068 | The NW Wood 540 meets: <ul style="list-style-type: none"> • Swing Panel: Open 1 lbf (2.8 N) & Close 1 lbf (3.9 N) • Folding Panels: Initiate Motion - Open 4 lbf (20 N) & Close 3 lbf (15 N) • Folding Panels: Maintain Motion - Open 1 lbf (3 N) & Close 1 lbf (4 N) | | | |
|  Operation / Cycling Performance AAMA 920 & DIN EN 1191 Windows and Pedestrian Doors - Mechanical Durability | The NW Wood 540 meets: <ul style="list-style-type: none"> • "AAMA 920" requirement for swing panel attached to side jamb: 500,000 cycles - Pass • German "DIN EN 1191/12400 Classification," where a unit is tested after 20,000 opening and closing cycles and is still functional | | | |

① Excerpts of results of 13' 1" W x 8' 6" H (4000 mm x 2600 mm) 4 panel unit (1L3R configuration) specific or equivalent to lab tested by Intertek Building & Construction, an independent testing laboratory in March 2020 per AAMA/WDMA/CSA 101/IS.2/A440-17, NAFS-17 - North American Fenestration Standard

② For Canada, tested to NAFS-17 or equivalent and CSA A44051-09 (for drainage of standing water, weep hole in sill by others).

* Water rating may not be applicable for configuration not tested, especially even panels plus even panels configurations.



Thermal Performance

NW Wood 540^③ - Rated, certified, and labeled
in accordance with NFRC 100 + 200

| TYPE OF GLASS (1 LITE) ^④ | CENTER OF GLASS U-FACTOR | INWARD OPENING UNITS | | | | OUTWARD OPENING UNITS | | | |
|--|--------------------------|----------------------|-------------------|-----------------|------------------|-----------------------|-------------------|-----------------|------------------|
| | | UNIT U-FACTOR | SHGC ^⑤ | VT ^⑥ | 2015 ENERGY STAR | UNIT U-FACTOR | SHGC ^⑤ | VT ^⑥ | 2015 ENERGY STAR |
| Double IG Clear (air filled) | .48 | .44 | .51 | .55 | - | .45 | .51 | .55 | - |
| Double IG Standard Low E (argon filled) | .25 | .29 | .23 | .47 | * | .30 | .23 | .47 | * |
| Double IG Standard Low E (air filled) | .30 | .33 | .23 | .47 | - | .33 | .23 | .47 | - |
| Triple IG Low E x 2 (argon filled) | .12 | .20 | .20 | .37 | * | .20 | .20 | .37 | * |
| Triple IG Low E x 2 (air filled) | .15 | .22 | .20 | .37 | * | .22 | .20 | .37 | * |
| Double IG Alternate Higher SHGC Low E (argon filled) | .25 | .29 | .32 | .48 | ** | .30 | .32 | .48 | ** |
| Double IG Alternate Higher SHGC Low E (air filled) | .29 | .32 | .32 | .48 | - | .33 | .32 | .48 | - |

NOTES

③ U-Factor, SHGC, & VT for NW Wood 540 system unhinged panels will be about the same except in some cases variations of +/- .01 from what is shown.

④ NFRC simulated U-factors of units with a horizontal mullion will have values of about .01 to .02 higher than units with no horizontal mullion. Please contact NanaWall for details.

⑤ SHGC = Solar Heat Gain Coefficient
⑥ VT = Visible Transmittance

* 2015 Energy Star Qualification Criteria: U-Factor for doors in all climate zones \leq .30, SHGC \leq .25 in South/South Central zones, and \leq .40 in North/North Central zones. (For guidance only. NanaWall is not a participant of the Energy Star program.)

** Meets SHGC Energy Star Qualification criteria for North/North Central zones only.

Shown above are thermal values for select glass options only. Thermal values for many other glass options are available. These may be able to meet specific requirements, such as Energy Star values for other zones, CA Title 24 prescriptive values, other state and local energy codes, etc. Thermal values for glass with other Low E coatings and Suntuitive dynamic glass are available. Please contact NanaWall for more information.

Low Profile Saddle Sill with UniverSILL® NW Wood 540

| TYPE OF TEST | OUTWARD OPENING UNITS | | | | |
|---|---|--|--|--|--|
|  Air Infiltration ^① ASTM E-283, ft ³ /min./ft. and NFRC 400 | @ 1.57 psf (75 Pa): 0.04 (0.02 exfiltration) A3 ^② <hr/> @ 6.24 psf (300 Pa): 0.07 | | | | |
|  Water Penetration ^{①*} ASTM E-547 and E-331 | No uncontrolled water entry ^① @ 7.5 psf (360 Pa) UniverSILL transforms Low Profile Saddle sill to obtain a better water rating when needed and to be easily removed when not required. To meet a water rating with the UniverSILL, the following needs to be done in the field by others: 1. Weepholes and drainage as described for the low profile saddle sill (minimum needed are weepholes from the middle channel). 2. Remove the gasket covering the inner channel and insert the UniverSILL. 3. Seals at ends at the side jambs. | | | | |
|  Structural Load ^① ASTM E-330: pass See design windload charts for other sized panels <i>Note that the structural test pressures were 50% higher than the design pressures shown.</i> | DESIGN PRESSURE <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center; padding: 5px;"> Positive @ 45 psf (2150 Pa) </td> <td style="text-align: center; padding: 5px;"> Negative @ 40 psf (1945 Pa) </td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 5px;"> Uniform Load Deflection, L/175 @ 52 psf (2520 Pa) Class CW-PG40 - FLD 4000 x 2600 </td> </tr> </table> | Positive @ 45 psf (2150 Pa) | Negative @ 40 psf (1945 Pa) | Uniform Load Deflection, L/175 @ 52 psf (2520 Pa) Class CW-PG40 - FLD 4000 x 2600 | |
| Positive @ 45 psf (2150 Pa) | Negative @ 40 psf (1945 Pa) | | | | |
| Uniform Load Deflection, L/175 @ 52 psf (2520 Pa) Class CW-PG40 - FLD 4000 x 2600 | | | | | |
|  Forced Entry Resistance ^① AAMA-1304 | In accordance with AAMA-1304 requirements | | | | |
|  Operating Force ^① ASTM E2068 | The NW Wood 540 meets: <ul style="list-style-type: none"> Swing Panel: Open 1 lbf (2.8 N) & Close 1 lbf (3.9 N) Folding Panels: Initiate Motion - Open 4 lbf (20 N) & Close 3 lbf (15 N) Folding Panels: Maintain Motion - Open 1 lbf (3 N) & Close 1 lbf (4 N) | | | | |
|  Operation / Cycling Performance AAMA 920 & DIN EN 1191 Windows and Pedestrian Doors - Mechanical Durability | The NW Wood 540 meets: <ul style="list-style-type: none"> "AAMA 920" requirement for swing panel attached to side jamb: 500,000 cycles - Pass German "DIN EN 1191/12400 Classification," where a unit is tested after 20,000 opening and closing cycles and is still functional | | | | |

① Excerpts of results of 13' 1" W x 8' 6" H (4000 mm x 2600 mm) 4 panel unit (1L3R configuration) specific or equivalent to lab tested by Intertek Building & Construction, an independent testing laboratory in March 2020 per AAMA/WDMA/CSA 101/1.S.2/ A440-17, NAFS-17 - North American Fenestration Standard

② For Canada, tested to NAFS-17 or equivalent and CSA A44051-09 (for drainage of standing water, weep hole in sill by others).

* Water rating may not be applicable for configuration not tested, especially even panels plus even panels configurations.



Thermal Performance

NW Wood 540 ^③ - Rated, certified, and labeled in accordance with NFRC 100 + 200

| | | OUTWARD OPENING UNITS | | | |
|--|--------------------------|-----------------------|-------------------|-----------------|------------------|
| TYPE OF GLASS (1 LITE) ^④ | CENTER OF GLASS U-FACTOR | UNIT U-FACTOR | SHGC ^⑤ | VT ^⑥ | 2015 ENERGY STAR |
| Double IG Clear (air filled) | .48 | .45 | .51 | .55 | - |
| Double IG Standard Low E (argon filled) | .25 | .30 | .23 | .47 | * |
| Double IG Standard Low E (air filled) | .30 | .33 | .23 | .47 | - |
| Triple IG Low E x 2 (argon filled) | .12 | .20 | .20 | .37 | * |
| Triple IG Low E x 2 (air filled) | .15 | .22 | .20 | .37 | * |
| Double IG Alternate Higher SHGC Low E (argon filled) | .25 | .30 | .32 | .48 | ** |
| Double IG Alternate Higher SHGC Low E (air filled) | .29 | .33 | .32 | .48 | - |

NOTES

③ U-Factor, SHGC, & VT for NW Wood 540 system unhinged panels will be about the same except in some cases variations of +/- .01 from what is shown.

④ NFRC simulated U-factors of units with a horizontal mullion will have values of about .01 to .02 higher than units with no horizontal mullion. Please contact NanaWall for details.

⑤ SHGC = Solar Heat Gain Coefficient
⑥ VT = Visible Transmittance

* 2015 Energy Star Qualification Criteria: U-Factor for doors in all climate zones ≤.30, SHGC ≤.25 in South/South Central zones, and ≤.40 in North/North Central zones. (For guidance only. NanaWall is not a participant of the Energy Star program.)


** Meets SHGC Energy Star Qualification criteria for North/North Central zones only.

Shown above are thermal values for select glass options only. Thermal values for many other glass options are available. These may be able to meet specific requirements, such as Energy Star values for other zones, CA Title 24 prescriptive values, other state and local energy codes, etc. Thermal values for glass with other Low E coatings and Suntuitive dynamic glass are available. Please contact NanaWall for more information.

Design Windload Chart | NW Wood 540

**Applies to Negative Design Pressure for Inswing Units with the Performance Sill
and Positive Design Pressure for Outswing Units with the Performance Sill**

(In Accordance with Allowable Stress Design (ASD) Design Pressures*)

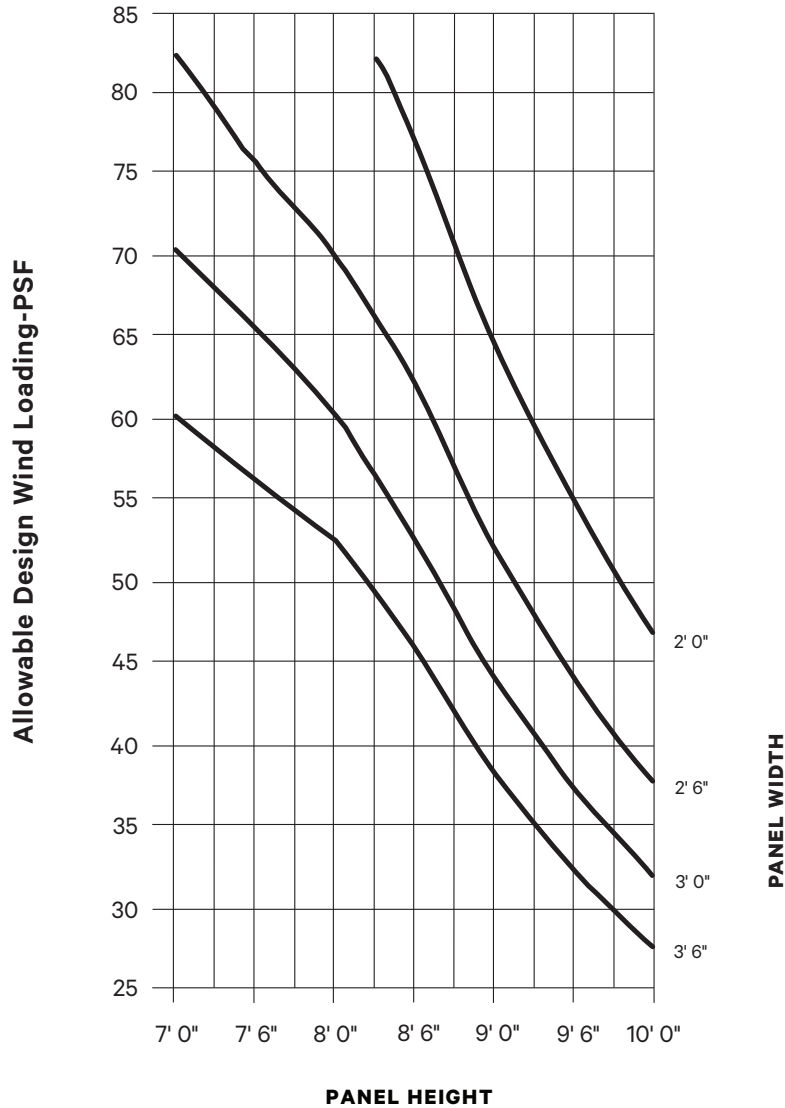

Any Custom Size is Possible. See Maximum Frame Size Chart for Possible Sizes.


(Derived from Comparative Analysis) Test Panel Size: 3' 3" W x 8' 2" H.

Please note that some jurisdictions may limit the use of these charts or may not accept them at all. Design pressures and/or sizes may be restricted to what was tested. These charts are also not restricted by any water ratings or deflection limitations. For Florida approval products, please see the FL Evaluation Report and Installation Instructions for restrictions. This chart is only applicable for units with standard NanaWall supplied locking.

* If the project design pressures have been calculated in accordance with Ultimate Design Wind Speed (ULT), then these design pressures have to be multiplied by a factor of 0.6 to obtain the equivalent ASD design pressures shown in this chart.

Design Windload Chart | NW Wood 540

Applies to Positive Design Pressure for Inswing Units with the Performance Sill and Negative Design Pressure for Outswing Units with the Performance Sill (In Accordance with Allowable Stress Design (ASD) Design Pressures*)

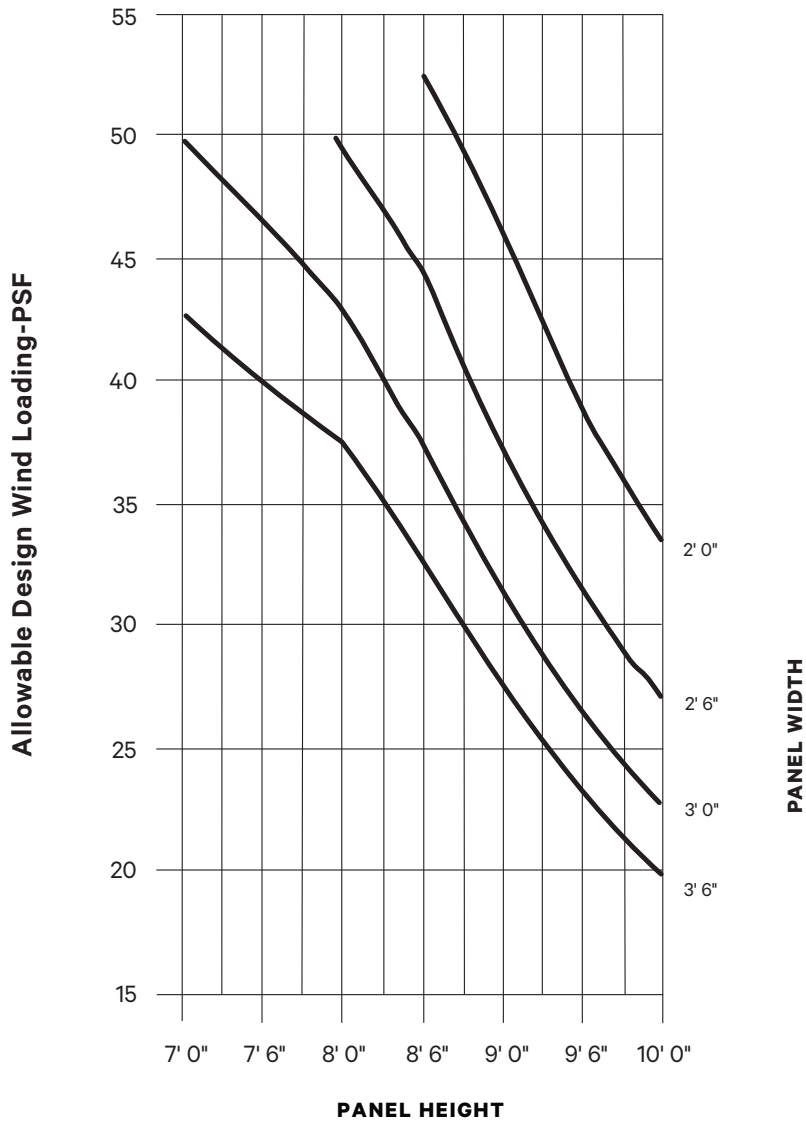


Any Custom Size is Possible. See Maximum Frame Size Chart for Possible Sizes.

(Derived from Comparative Analysis) Test Panel Size: 3' 3" W x 8' 2" H.
 Please note that some jurisdictions may limit the use of these charts or may not accept them at all. Design pressures and/or sizes may be restricted to what was tested. These charts are also not restricted by any water ratings or deflection limitations. For Florida approval products, please see the FL Evaluation Report and Installation Instructions for restrictions. This chart is only applicable for units with standard NanaWall supplied locking.

* If the project design pressures have been calculated in accordance with Ultimate Design Wind Speed (ULT), then these design pressures have to be multiplied by a factor of 0.6 to obtain the equivalent ASD design pressures shown in this chart.

Design Windload Chart | NW Wood 540

Applies to Negative Design Pressure for Inswing Units and Positive Design Pressure for Outswing Units with the Low Profile Saddle Sill
 (In Accordance with Allowable Stress Design (ASD) Design Pressures*)

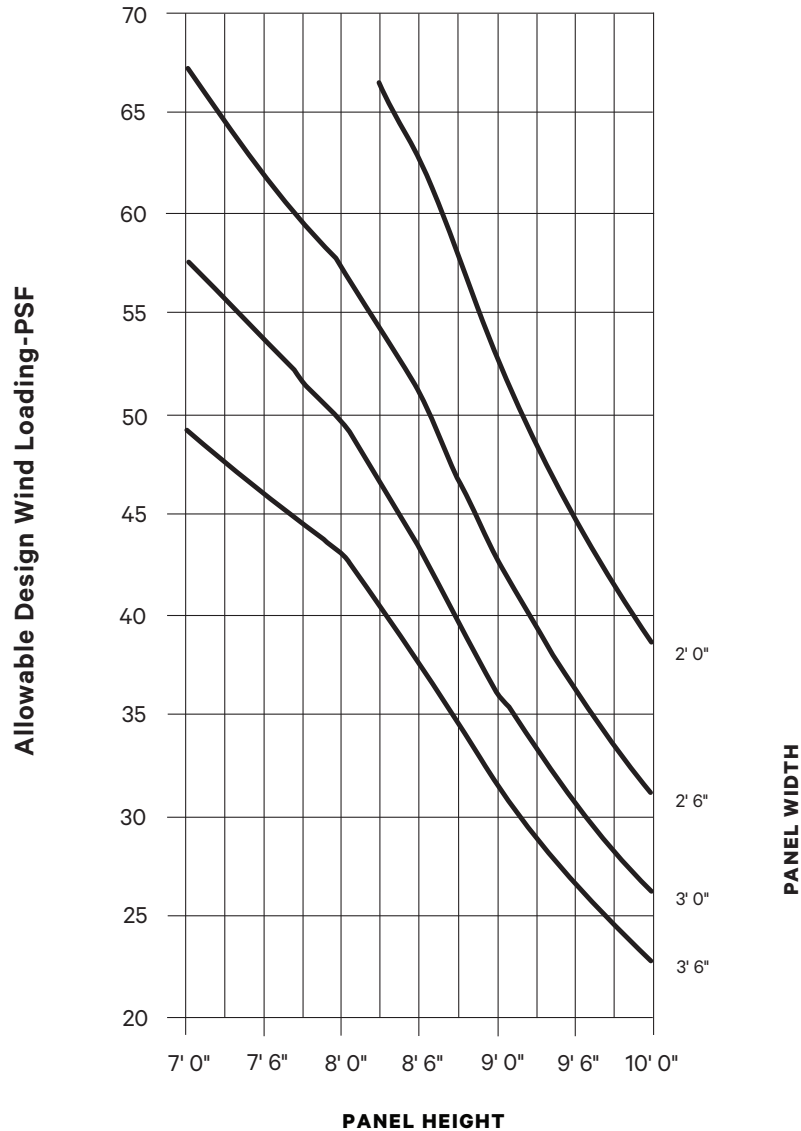


Any Custom Size is Possible. See Maximum Frame Size Chart for Possible Sizes.

(Derived from Comparative Analysis) Test Panel Size: 3' 3" W x 8' 2" H.
 Please note that some jurisdictions may limit the use of these charts or may not accept them at all. Design pressures and/or sizes may be restricted to what was tested. These charts are also not restricted by any water ratings or deflection limitations. For Florida approval products, please see the FL Evaluation Report and Installation Instructions for restrictions. This chart is only applicable for units with standard NanaWall supplied locking.

* If the project design pressures have been calculated in accordance with Ultimate Design Wind Speed (ULT), then these design pressures have to be multiplied by a factor of 0.6 to obtain the equivalent ASD design pressures shown in this chart.

Design Windload Chart | NW Wood 540

Applies to Positive Design Pressure for Inswing Units and Negative Design Pressure for Outswing Units with the Low Profile Saddle Sill
 (In Accordance with Allowable Stress Design (ASD) Design Pressures*)

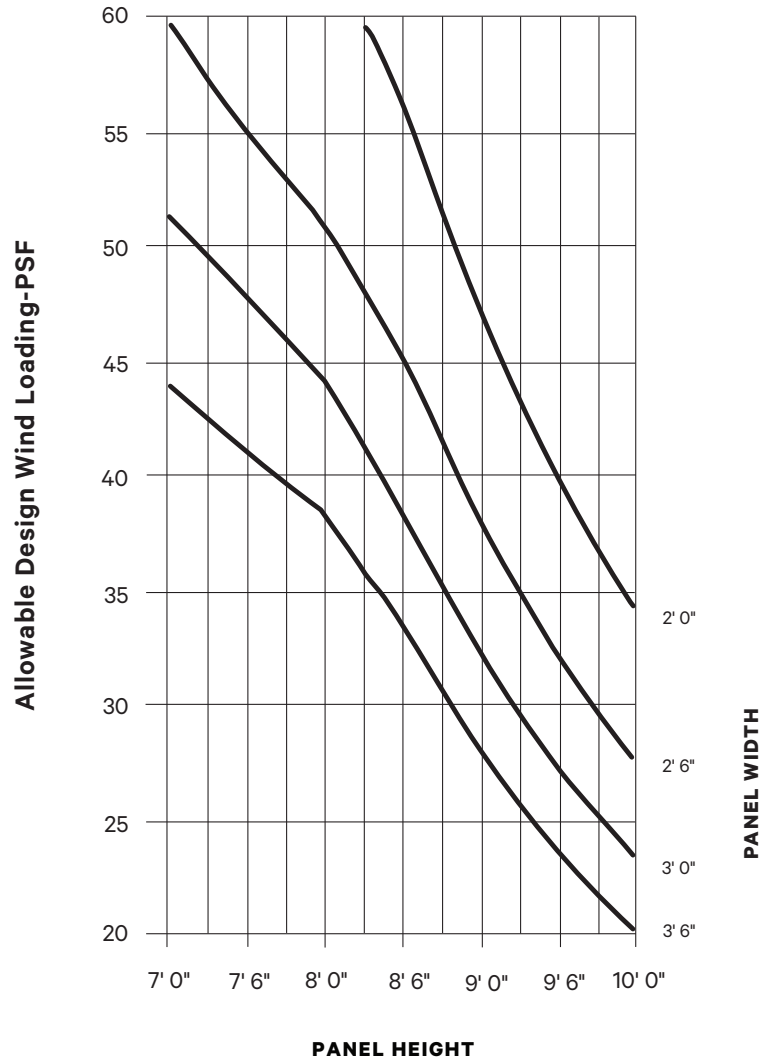


Any Custom Size is Possible. See Maximum Frame Size Chart for Possible Sizes.

(Derived from Comparative Analysis) Test Panel Size: 3' 3" W x 8' 2" H.
 Please note that some jurisdictions may limit the use of these charts or may not accept them at all. Design pressures and/or sizes may be restricted to what was tested. These charts are also not restricted by any water ratings or deflection limitations. For Florida approval products, please see the FL Evaluation Report and Installation Instructions for restrictions. This chart is only applicable for units with standard NanaWall supplied locking.

* If the project design pressures have been calculated in accordance with Ultimate Design Wind Speed (ULT), then these design pressures have to be multiplied by a factor of 0.6 to obtain the equivalent ASD design pressures shown in this chart.

Maximum Size Chart NW Wood 540 (Double Glazed)

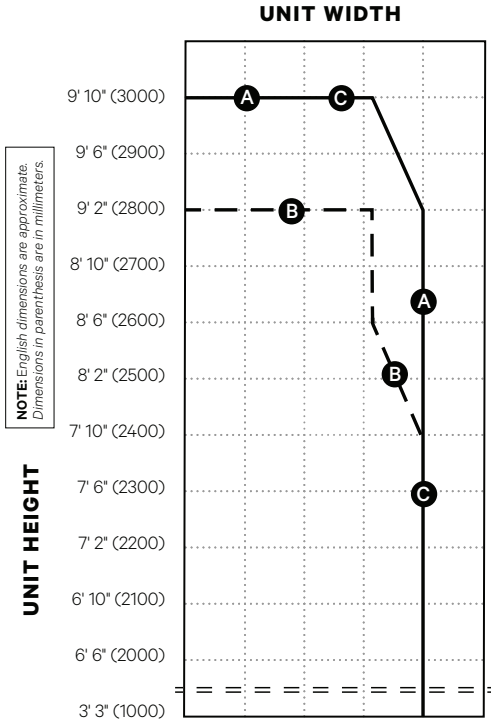

| Number of Panels in Unit | Frame Width of Unit | | | | |
|--------------------------|---------------------|----------------|----------------|----------------|----------------|
| | 1' 11" (600) | 2' 3" (700) | 2' 7" (800) | 2' 11" (900) | 3' 3" (1000) |
| 1 | 3' 11" (1200) | 4' 7" (1400) | 5' 3" (1600) | 5' 10" (1800) | 6' 6" (2000) |
| 2 | 5' 10" (1800) | 6' 10" (2100) | 7' 10" (2400) | 8' 10" (2700) | 9' 10" (3000) |
| 3 | 7' 10" (2400) | 9' 2" (2800) | 10' 6" (3200) | 11' 9" (3600) | 13' 1" (4000) |
| 4 | 9' 10" (3000) | 11' 5" (3500) | 13' 1" (4000) | 14' 9" (4500) | 16' 4" (5000) |
| 5 | 11' 9" (3600) | 13' 10" (4200) | 15' 8" (4800) | 17' 8" (5400) | 19' 8" (6000) |
| 6 | 13' 10" (4200) | 16' 0" (4900) | 18' 4" (5600) | 20' 8" (6300) | 22' 10" (7000) |
| 7 | 15' 8" (4800) | 18' 4" (5600) | 20' 11" (6400) | 23' 7" (7200) | 26' 1" (8000) |
| 8 | 17' 9" (5400) | 20' 7" (6300) | 23' 6" (7200) | 26' 6" (8100) | 29' 4" (9000) |
| 9 | 19' 8" (6000) | 22' 10" (7000) | 26' 1" (8000) | 29' 6" (9000) | 32' 9" (10000) |
| 10 | 21' 7" (6600) | 25' 1" (7700) | 28' 8" (8800) | 32' 5" (9900) | 36' 1" (11000) |
| 11 | 23' 6" (7200) | 27' 4" (8400) | 31' 5" (9600) | 35' 5" (10800) | 39' 4" (12000) |
| 12 | | | | | |

Frame Width of Unit
(Wider widths possible with addition of Panel Sets.)

Any Custom Size is Possible Up to the Maximum Size Limit Lines Shown

MAXIMUM SIZE LIMIT LINE OF:

A CONFIGURATIONS ———
(Swing panel hinged at jamb only.)

Standard Configurations:
1L | 1L 1R | 1L 4R | 2L 1R | 4L 1R | 6L 1R
1R | 1L 2R | 1L 6R

Sample Configurations with Unhinged FourFold or SixFold Panel Sets:
1L 4L/R | 1L 6L/R 1R | 4L/R 1R
Addition of Panel Sets to all A Configurations possible.

C CONFIGURATIONS ———
(No swing panels.)

Standard Configurations:
2L | 4L | 6L | 2L 2R | 4L 2R | 6L 2R
2R | 4R | 6R | 2L 4R | 4L 4R | 6L 4R
2L 6R | 4L 6R | 6L 6R

Sample Configurations with Unhinged FourFold or SixFold Panel Sets:
2L 4L/R | 4L/R 4R | 6L 6L/R | 4L/R 4L/R | 6L/R 4L/R
Addition of Panel Sets to all C Configurations possible.

B CONFIGURATIONS - - -
(Swing panel as part of odd number of panels to one side.)

Standard Configurations:
3L | 5L | 1L 3R | 3L 2R | 5L 1R | 4L 3R | 3L 6R | 6L 3R | 5L 6R
3R | 5R | 3L 1R | 3L 3R | 2L 5R | 5L 2R | 4L 5R | 5L 3R | 6L 5R
2L 3R | 1L 5R | 3L 4R | 3L 5R | 5L 4R | 5L 5R

Sample Configurations with Unhinged FourFold or SixFold Panel Sets:
3L 4L/R | 3L 6L/R | 3L 4L/R 3R
Addition of Panel Sets to all B Configurations possible.


GLAZING

- Total Glass thicknesses from 1 1/8" (28 mm) to 1 7/8" (48 mm) can be accommodated.
- Maximum size chart is based on maximum glass weight of 30 kg/m² (6 lbs/ft²).
- Dry glazing system.

NOTES

- Max. panel width swing panel attached to side jamb 3' 3" (1000 mm).
- Min. panel width 31 1/2" (800 mm) for paired panels hinged to side jamb.
- Min. panel width 25 5/8" (650 mm) for Panel Sets 4L/R, 6L/R.
- Max. number of hinged panels to one side is 6.
- No limitation on number of unhinged panel sets in a unit. Additional adequate structural lateral support by others where panels stack.
- Configurations with even panels meeting even panels, including panel sets, provide lower weather resistant results from tested units.
- For other configurations, contact NanaWall.

Maximum Size Chart NW Wood 540 (Triple Glazed)

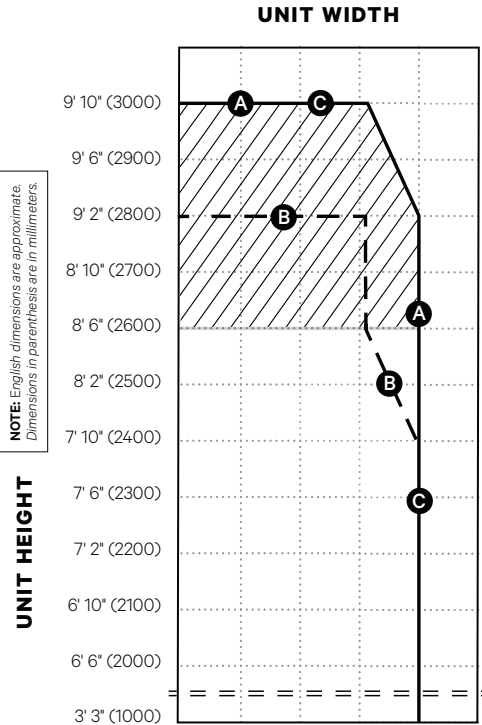

NOTE: English dimensions are approximate. Dimensions in parenthesis are in millimeters.

UNIT HEIGHT

Number of Panels in Unit

| | | | | | |
|----|-------------------|-------------------|-------------------|-------------------|-------------------|
| 1 | 1' 11" (600) | 2' 3" (700) | 2' 7" (800) | 2' 11" (900) | 3' 3" (1000) |
| 2 | 3' 11" (1200) | 4' 7" (1400) | 5' 3" (1600) | 5' 10" (1800) | 6' 6" (2000) |
| 3 | 5' 10" (1800) | 6' 10" (2100) | 7' 10" (2400) | 8' 10" (2700) | 9' 10" (3000) |
| 4 | 7' 10" (2400) | 9' 2" (2800) | 10' 6" (3200) | 11' 9" (3600) | 13' 1" (4000) |
| 5 | 9' 10" (3000) | 11' 5" (3500) | 13' 1" (4000) | 14' 9" (4500) | 16' 4" (5000) |
| 6 | 11' 9" (3600) | 13' 10" (4200) | 15' 8" (4800) | 17' 8" (5400) | 19' 8" (6000) |
| 7 | 13' 10" (4200) | 16' 0" (4900) | 18' 4" (5600) | 20' 8" (6300) | 22' 10" (7000) |
| 8 | 15' 8" (4800) | 18' 4" (5600) | 20' 11" (6400) | 23' 7" (7200) | 26' 1" (8000) |
| 9 | 17' 9" (5400) | 20' 7" (6300) | 23' 6" (7200) | 26' 6" (8100) | 29' 4" (9000) |
| 10 | 19' 8" (6000) | 22' 10" (7000) | 26' 1" (8000) | 29' 6" (9000) | 32' 9" (10000) |
| 11 | 21' 7" (6600) | 25' 1" (7700) | 28' 8" (8800) | 32' 5" (9900) | 36' 1" (11000) |
| 12 | 23' 6" (7200) | 27' 4" (8400) | 31' 5" (9600) | 35' 5" (10800) | 39' 4" (12000) |

Frame Width of Unit

(Wider widths possible with addition of Panel Sets.)

Any Custom Size is Possible Up to the Maximum Size Limit Lines Shown

MAXIMUM SIZE LIMIT LINE OF:

A CONFIGURATIONS ———

(Swing panel hinged at jamb only.)

Standard Configurations:

| | | | | | |
|----|-------|-------|-------|-------|-------|
| 1L | 1L 1R | 1L 4R | 2L 1R | 4L 1R | 6L 1R |
| 1R | 1L 2R | 1L 6R | | | |

Sample Configurations with Unhinged FourFold or SixFold Panel Sets:

| | | |
|---------|------------|---------|
| 1L 4L/R | 1L 6L/R 1R | 4L/R 1R |
|---------|------------|---------|

Addition of Panel Sets to all A Configurations possible.

C CONFIGURATIONS ———

(No swing panels.)

Standard Configurations:

| | | | | | |
|----|----|----|-------|-------|-------|
| 2L | 4L | 6L | 2L 2R | 4L 2R | 6L 2R |
| 2R | 4R | 6R | 2L 4R | 4L 4R | 6L 4R |
| | | | 2L 6R | 4L 6R | 6L 6R |

Sample Configurations with Unhinged FourFold or SixFold Panel Sets:

| | | | | |
|---------|---------|---------|-----------|-----------|
| 2L 4L/R | 4L/R 4R | 6L 6L/R | 4L/R 4L/R | 6L/R 4L/R |
|---------|---------|---------|-----------|-----------|

Addition of Panel Sets to all C Configurations possible.

B CONFIGURATIONS - - -

(Swing panel as part of odd number of panels to one side.)

Standard Configurations:

| | | | | | | | | |
|----|----|-------|-------|-------|-------|-------|-------|-------|
| 3L | 5L | 1L 3R | 3L 2R | 5L 1R | 4L 3R | 3L 6R | 6L 3R | 5L 6R |
| 3R | 5R | 3L 1R | 3L 3R | 2L 5R | 5L 2R | 4L 5R | 5L 3R | 6L 5R |
| | | 2L 3R | 1L 5R | 3L 4R | 3L 5R | 5L 4R | 5L 5R | |

Sample Configurations with Unhinged FourFold or SixFold Panel Sets:

| | | |
|---------|---------|------------|
| 3L 4L/R | 3L 6L/R | 3L 4L/R 3R |
|---------|---------|------------|

Addition of Panel Sets to all B Configurations possible.





Horizontal mullion required for unit height taller than 8' 6" (2600 mm) such that no glass pane is more than 7' 10" (2400 mm) tall.


GLAZING

- Glass thicknesses from 1/16" (36 mm) to 1/8" (48 mm) can be accommodated.
- Maximum size chart is based on maximum glass weight of 30 kg/m² (6 lbs/ft²).
- Dry glazing system.


NOTES

- Max. panel width swing panel attached to side jamb 3' 3" (1000 mm).
- Min. panel width 31 1/2" (800 mm) for paired panels hinged to side jamb.
- Min. panel width 25 5/8" (650 mm) for Panel Sets 4L/R, 6L/R.
- Max. number of hinged panels to one side is 6.
- No limitation on number of unhinged panel sets in a unit. Additional adequate structural lateral support by others where panels stack.
- Configurations with even panels meeting even panels, including panel sets, provide lower weather resistant results from tested units.
- For other configurations, contact NanaWall.

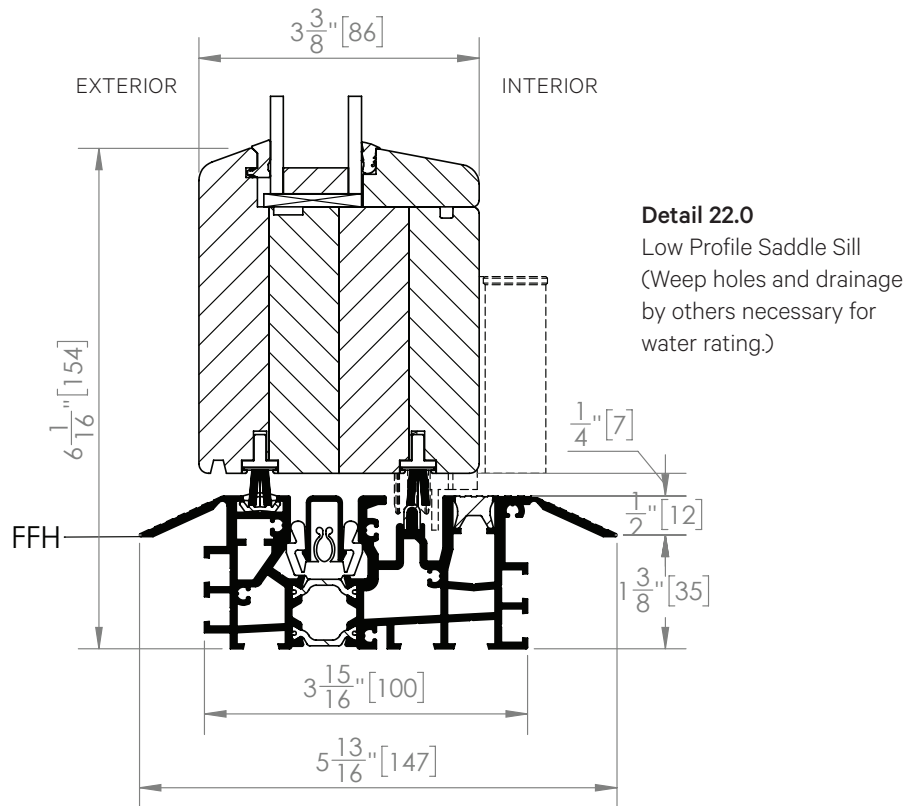
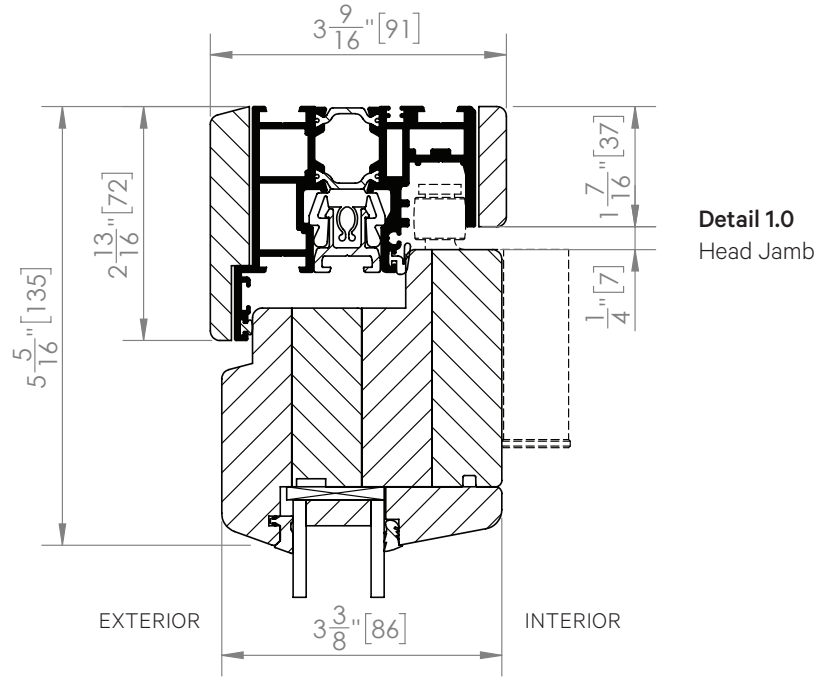


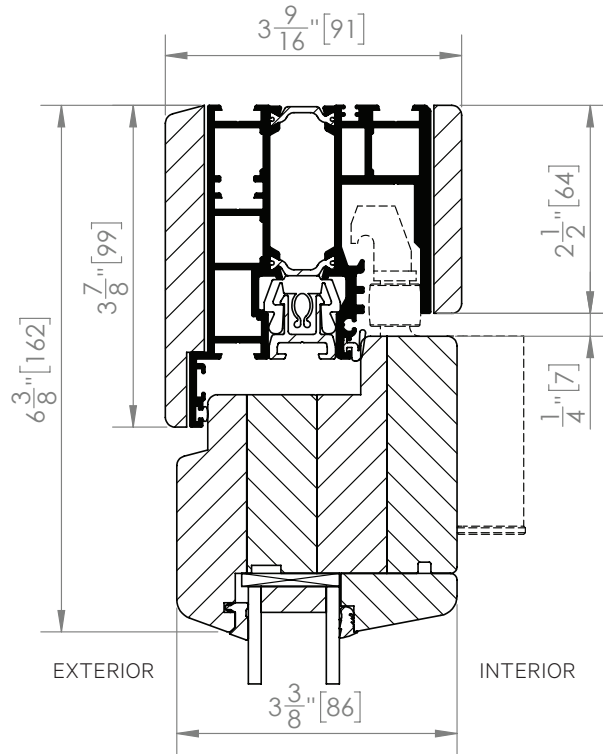


Detail 12.0
Head Jamb for
UnHINGED Panel Sets

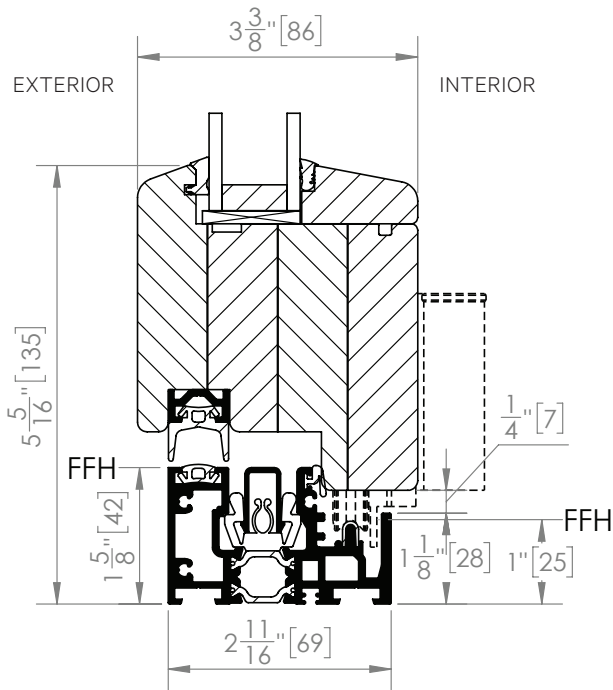


Detail 2.0
Performance Sill
(Proper drainage by others
of water exiting sill weep
slots necessary.)

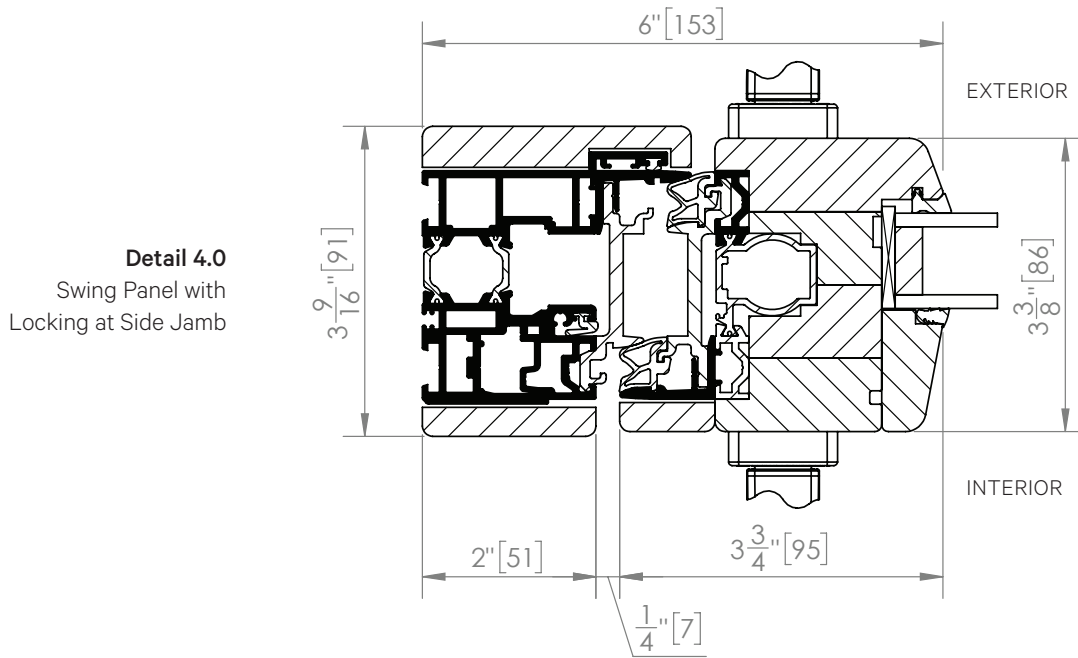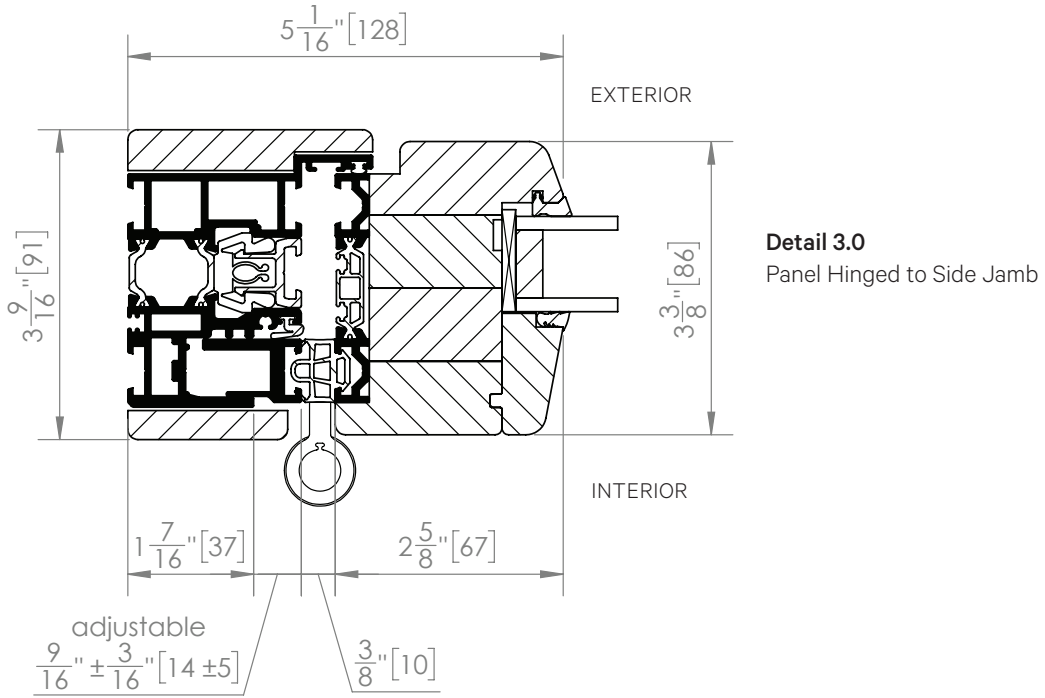


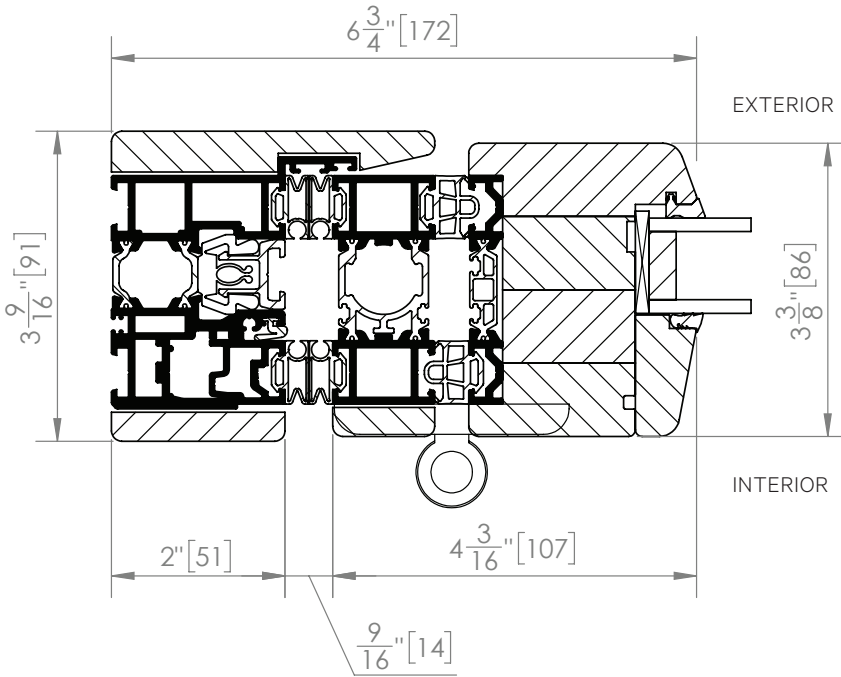

Detail 5.0
Panel with Running Post and Top and Bottom Rollers Attached Meeting at Side Jamb


Detail 7C.0
Hinged Folding Panels

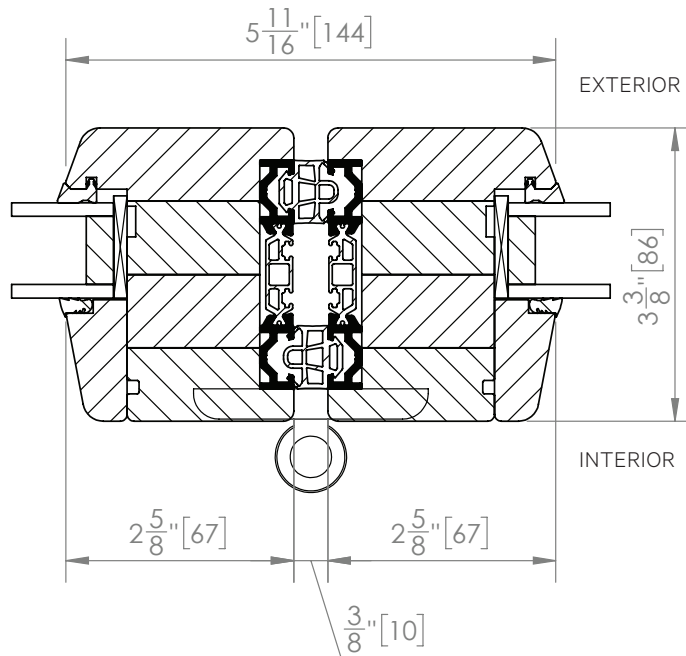


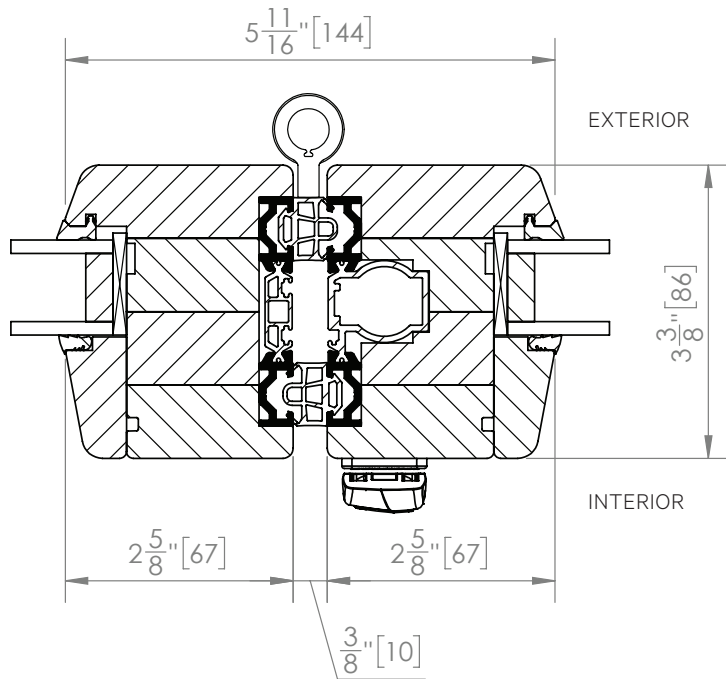


Detail 7.0
Hinged Folding Panels
with Locking

Detail 8.0
Pair of Swing Panels with
Primary Swing Panel with
Lever Handle Locking on
Right and Secondary Swing
Panel with Concealed Edge
Lock on Left

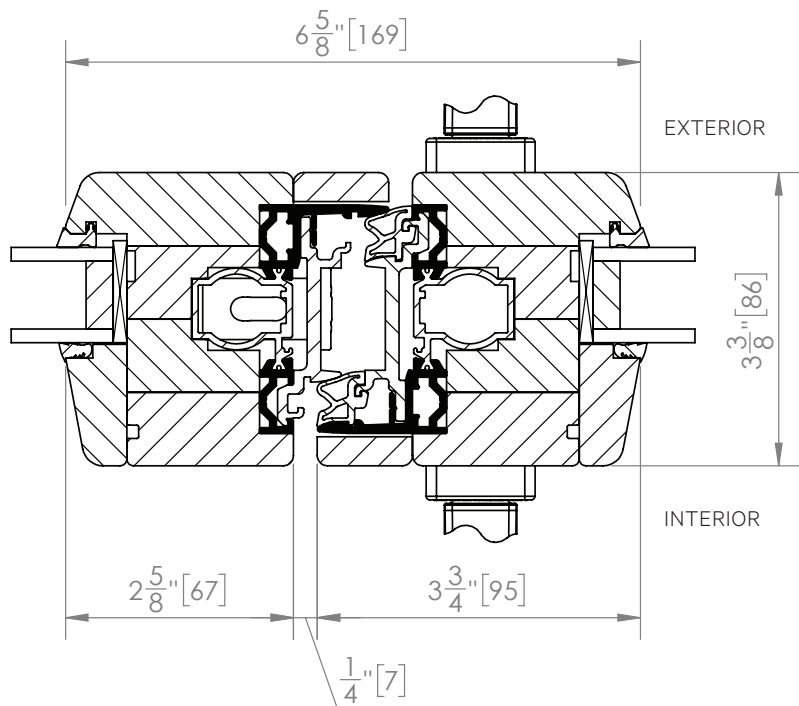


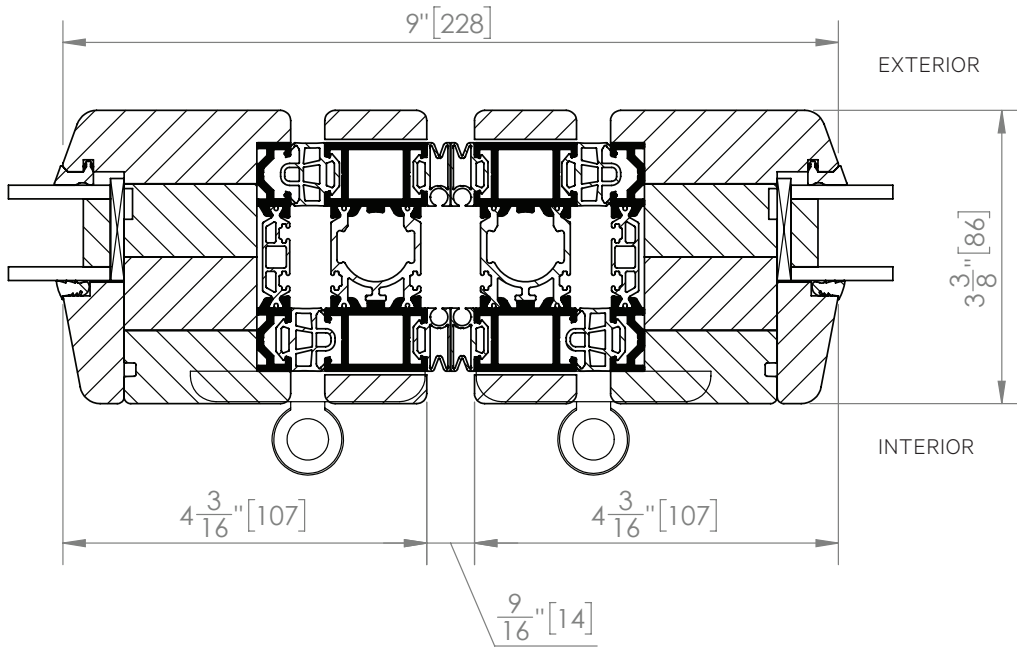

Detail 9.0
Meeting of Folding Panels with Running Post and Top and Bottom Rollers Attached

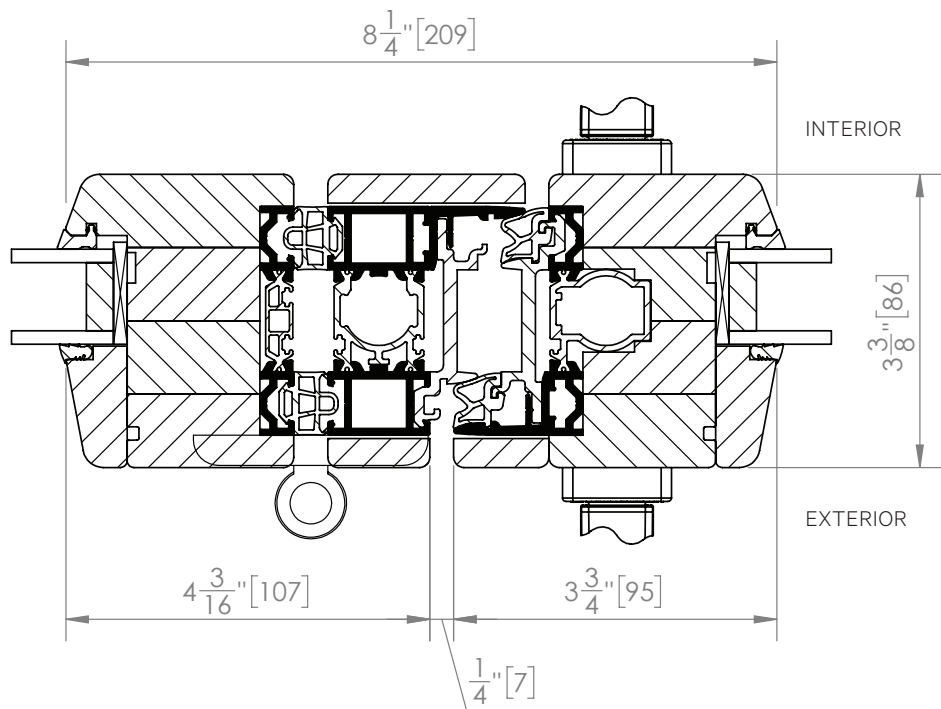


Detail 10.0
Meeting of Swing Panel with Locking and Folding Panel with Running Post and Top and Bottom Rollers Attached

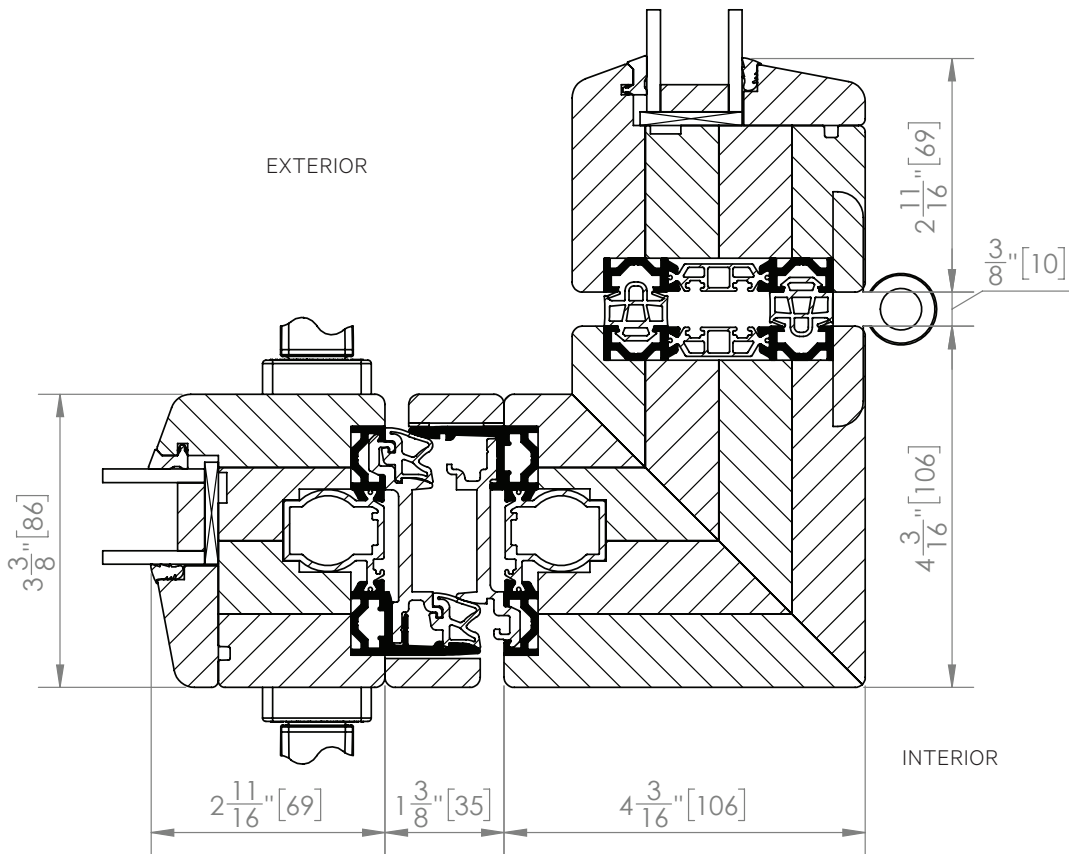


Detail 35.0

Meeting of Swing Panel with Locking and Folding Panel with a Combined Running Post with Top and Bottom Rollers and a 90-Degree Corner Post Attached with Concealed Edge Lock for an Inside Corner

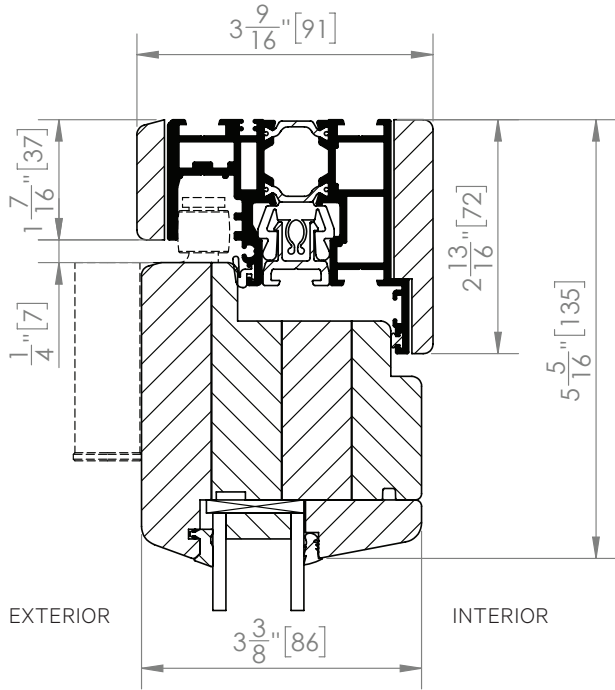



Detail 1.1
Head Jamb

Detail 22.1 UniverSILL®
Low Profile Saddle Sill with UniverSILL®
(Weep holes and drainage by others necessary for water rating.)

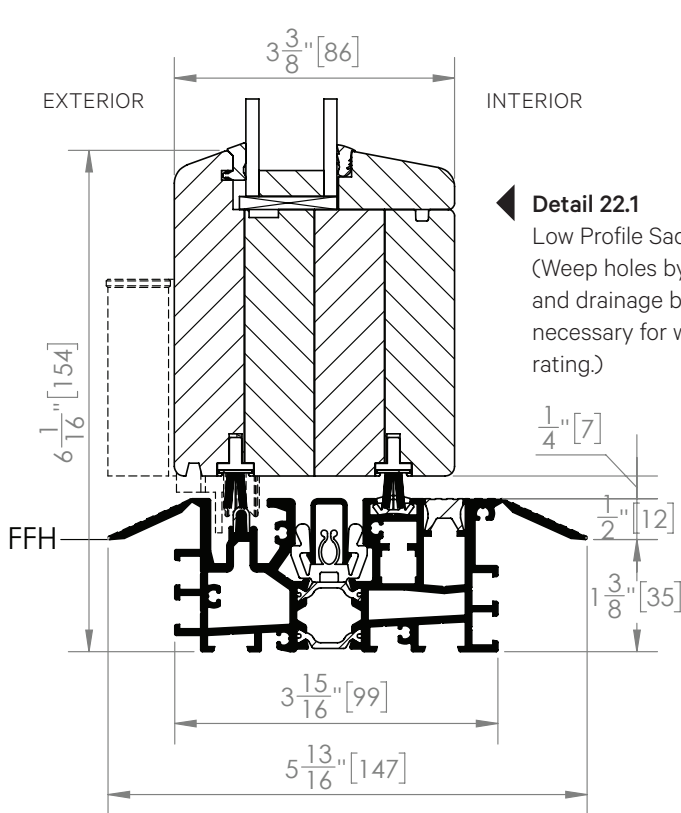


Detail 22.1
Low Profile Saddle Sill
(Weep holes by others and drainage by others necessary for water rating.)

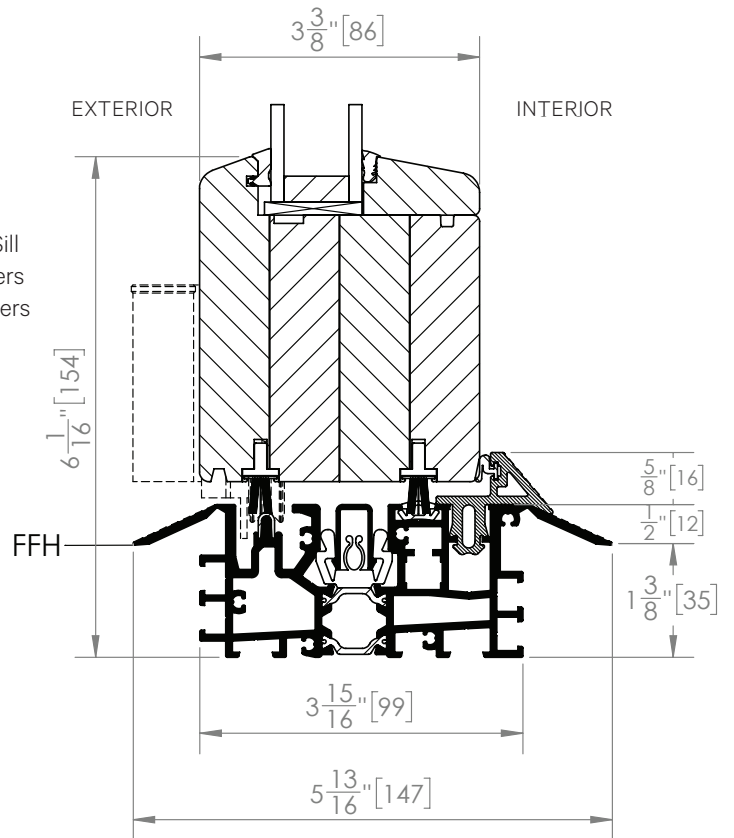


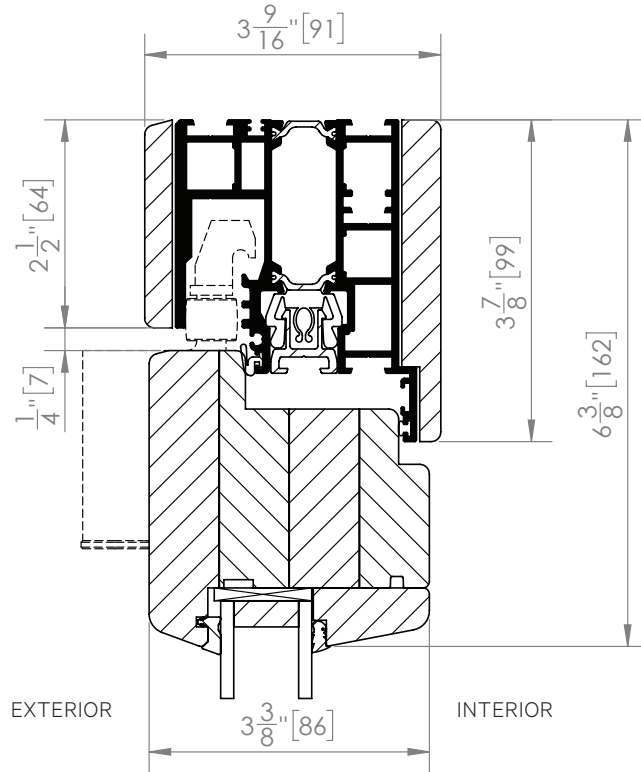

Detail 12.1
Head Jamb for
UnHINGED Panel Sets

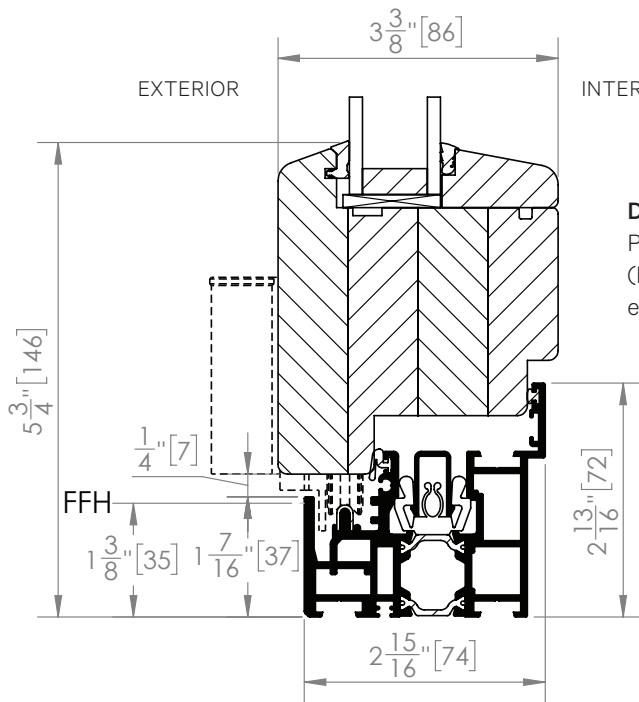



Detail 2.1
Performance Sill
(Proper drainage by others of water
exiting weep slots necessary.)

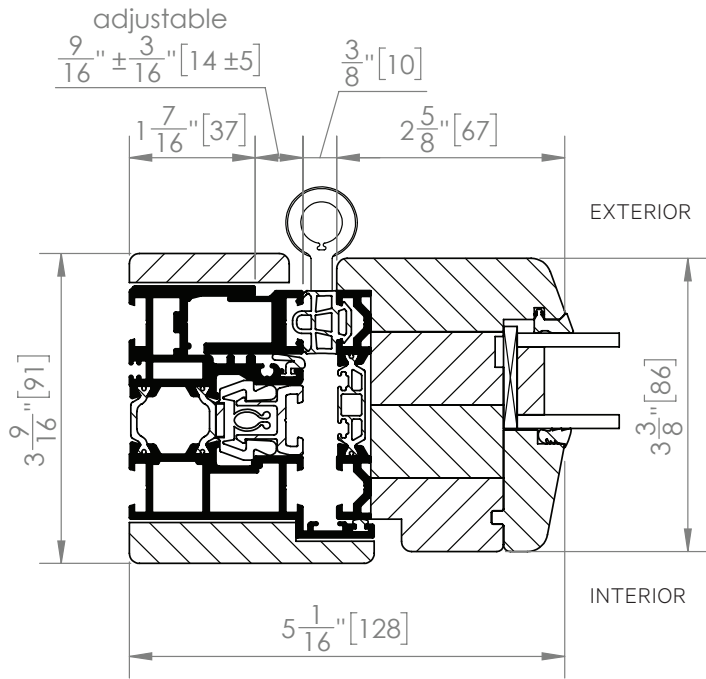


Detail 3.1
 Panel Hinged to Side Jamb

Detail 4.1
 Swing Panel with
 Locking at Side Jamb

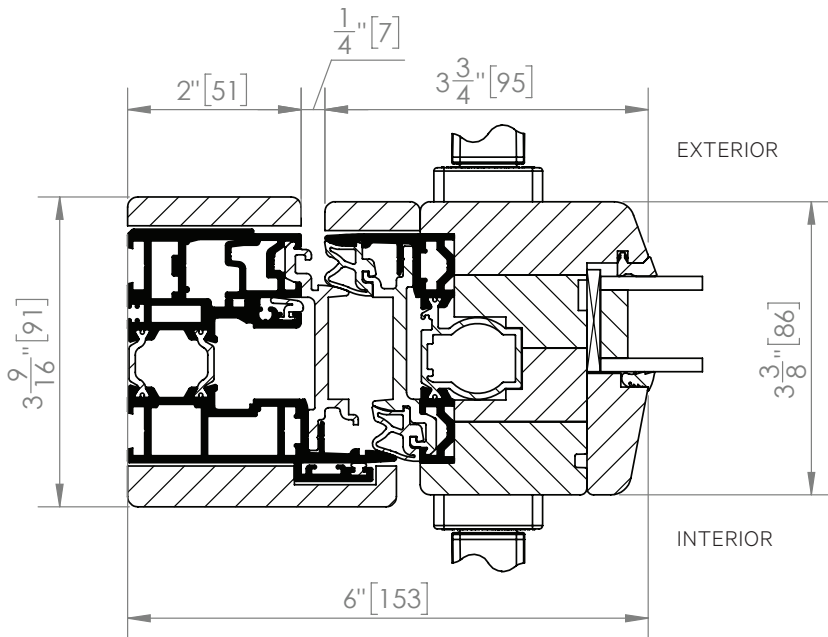


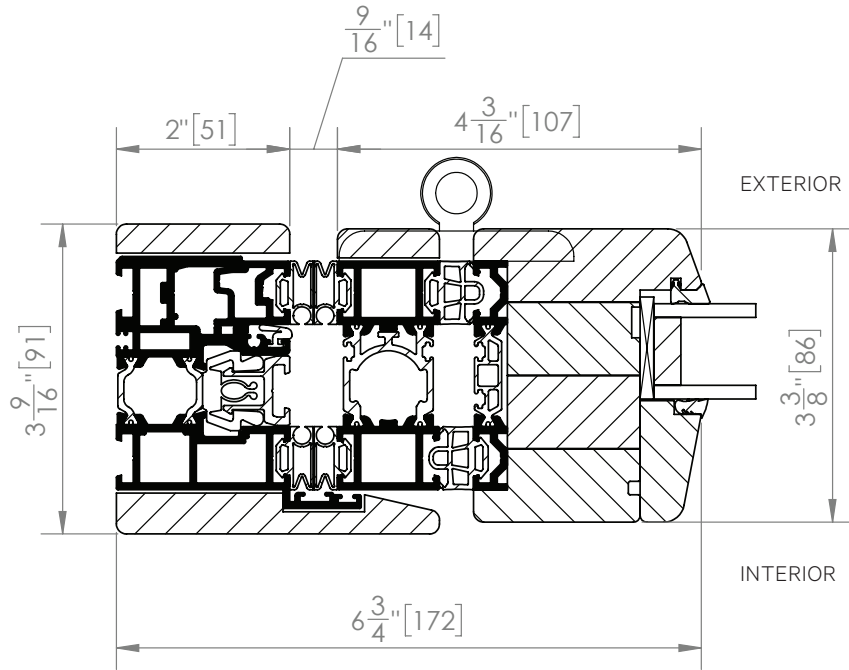


Detail 5.1
Panel with Running Post
and Top and Bottom Rollers
Attached at Side Jamb

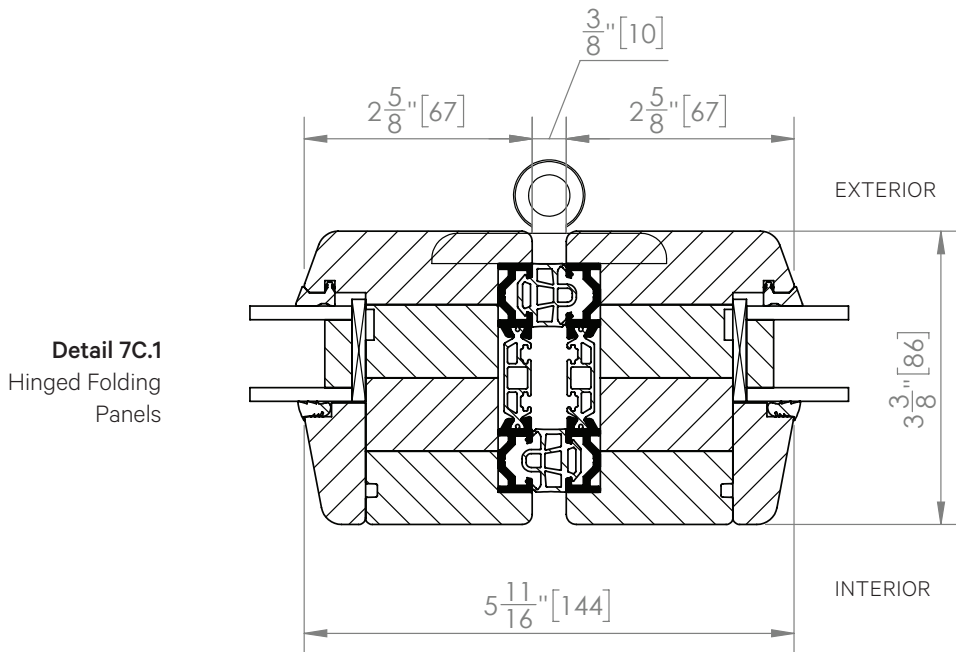


Detail 7C.1
Hinged Folding
Panels

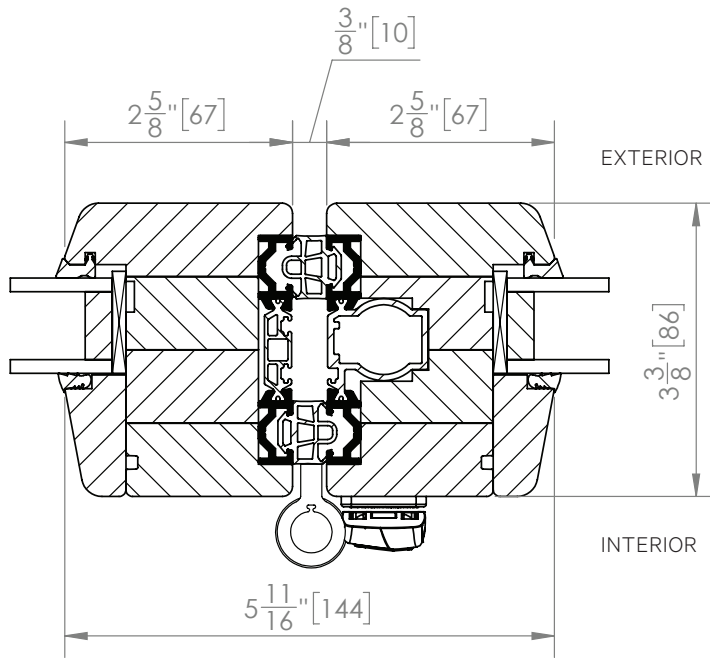

Detail 7.1
Hinged Folding Panels
with Locking

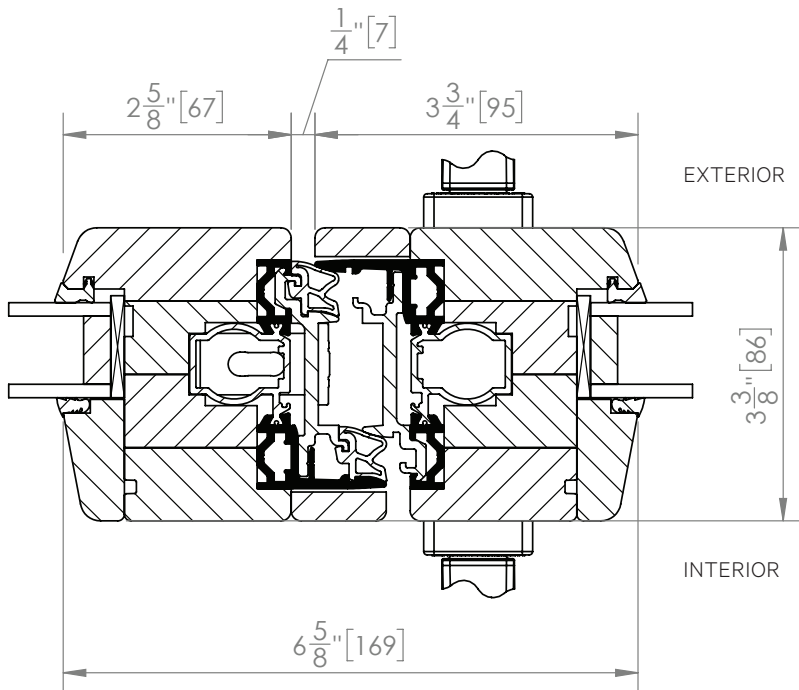



Detail 8.1
Pair of Swing Panels with
Primary Swing Panel with Lever
Handle Locking on Right and
Secondary Swing Panel with
Concealed Edge Lock on Left

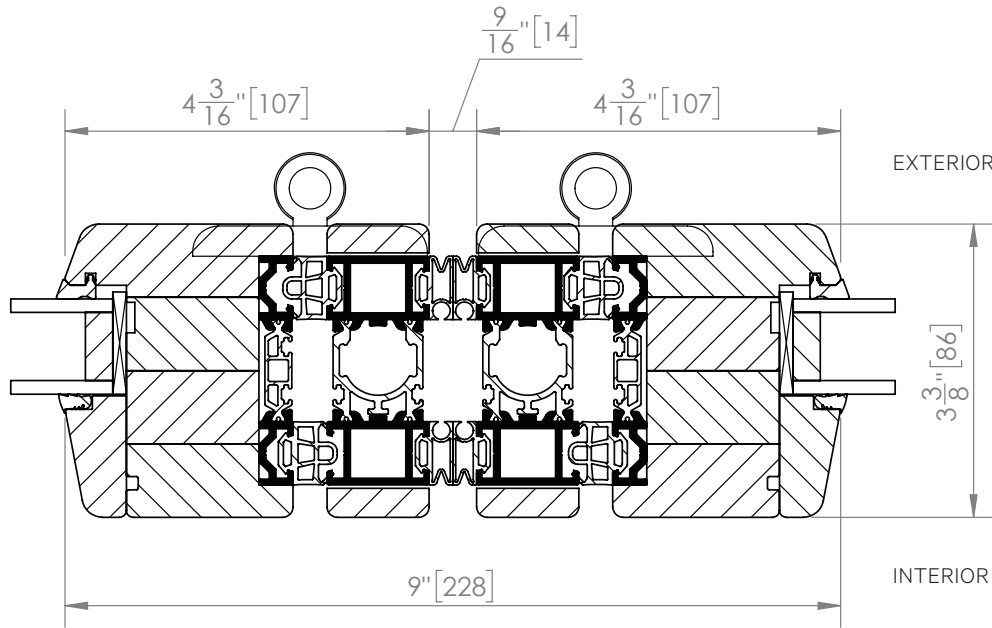

Detail 9.1
Meeting of Folding Panels with Running Post and Top and Bottom Rollers Attached


Detail 10.1
Meeting of Swing Panel with Locking and Folding Panel with Running Post and Top and Bottom Rollers Attached

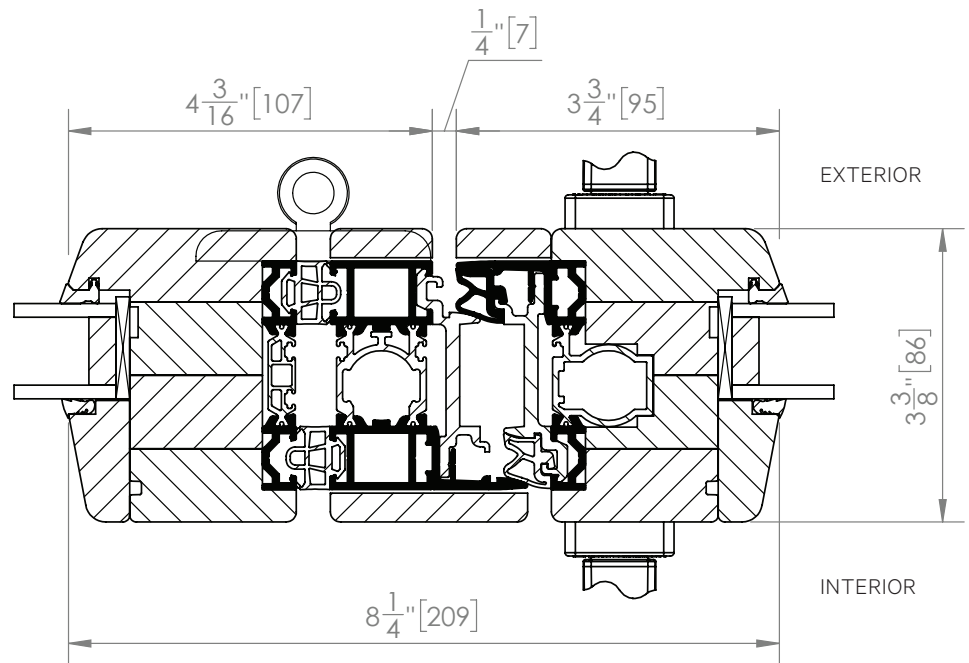

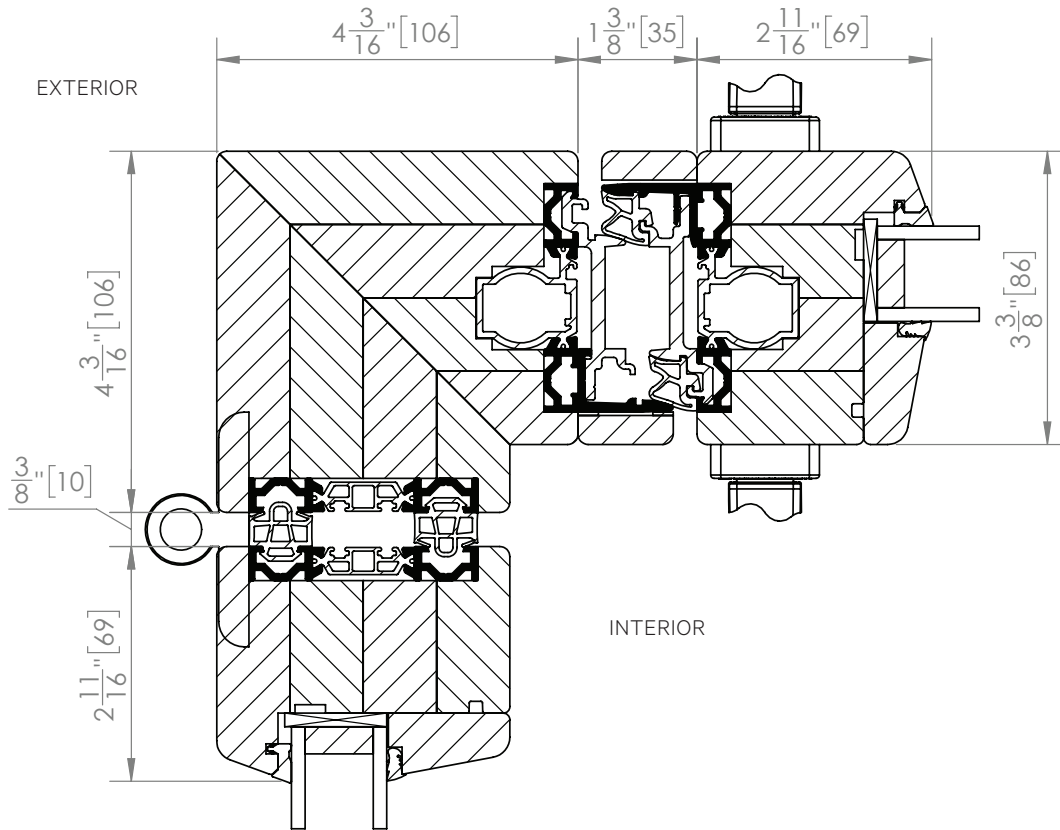


Detail 35.1


Meeting of Swing Panel with Locking and Folding Panel with a Combined Running Post with Top and Bottom Rollers and a 90-Degree Corner Post Attached with Concealed Edge Lock for an Outside Corner

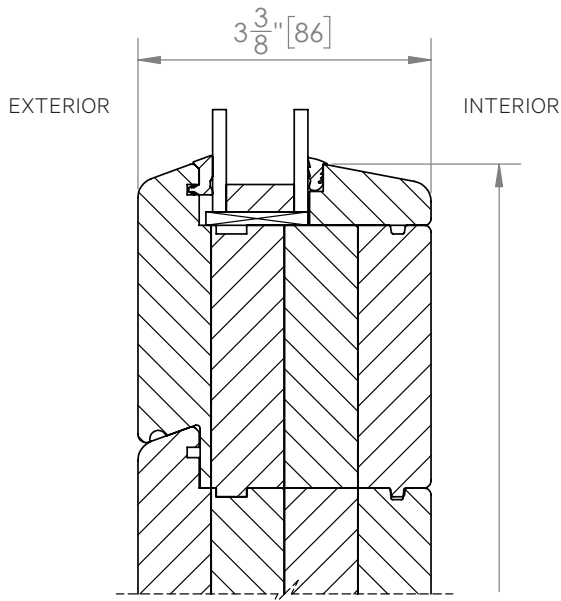


Typical Higher Bottom Rail

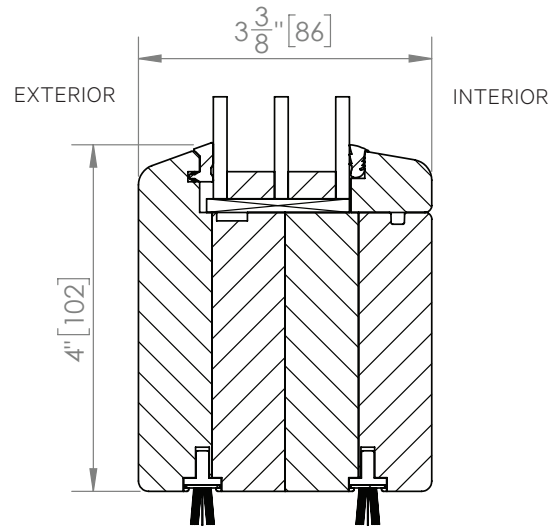

Typical Glass Stop Profile with Triple Glazing

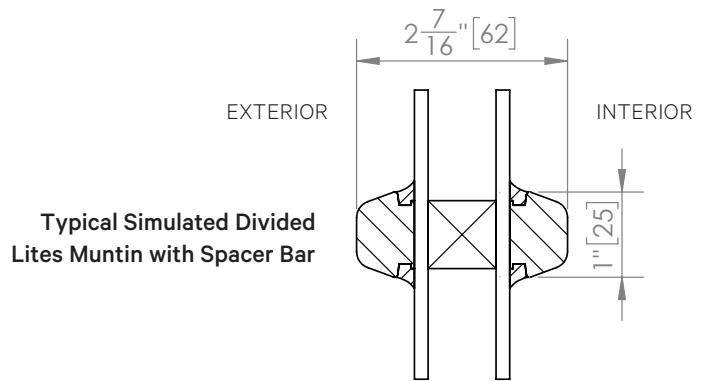

Typical Simulated Divided Lites Muntin with Spacer Bar

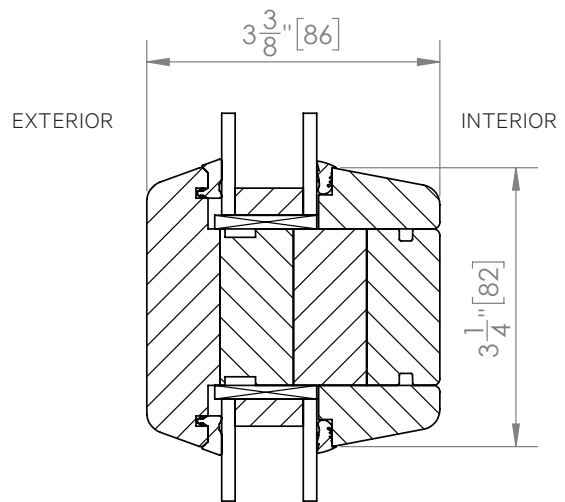

Typical Mullion Profile

Suggested Typical Installation

INSTALLATION NOTES

Suggested Typical Installation drawings shown are very general and may not be suitable for any particular installation. Product placement, fasteners, flashing, waterproofing, sealant, trim, and other details for specific surrounding conditions must be properly designed and provided by others.


INSTALLATION CONSIDERATIONS

The approximate weight of a panel with double glazing is 5.5-7.5 lbs/ft² (27-37 kg/m²) and with triple glazing is 7-8 lbs/ft² (34-39 kg/m²). The maximum vertical structural deflection of the header should be ¼" (6 mm) under full live and dead loads. Although for Floor Supported systems, there is no vertical live load deflection of the header from the weight of the panels, structural support for lateral loads (both windload and when the panels are stacked open) must be provided for the header, surrounding walls, and floor. For further information, see "Preparation of the Rough Opening" section in the Installation Instructions for the applicable system. An owner's manual with these Installation Instructions is available from NanaWall or from NanaWall's website.


It is recommended that all building dead loads be applied to the header prior to installing the NanaWall. If so and if a reasonable amount of time has been allowed for the effect of this dead load to be imposed on the header, then only the building's live load can be used to account for the above maximum header deflection of ¼" (6 mm). There may be additional structural requirements not mentioned here.

Note: For some jurisdictions, any standing water in sill channels must be drained. Weep holes for this purpose are to be done by others in the field, including drain connections if sill is recessed.


Inward Opening Details

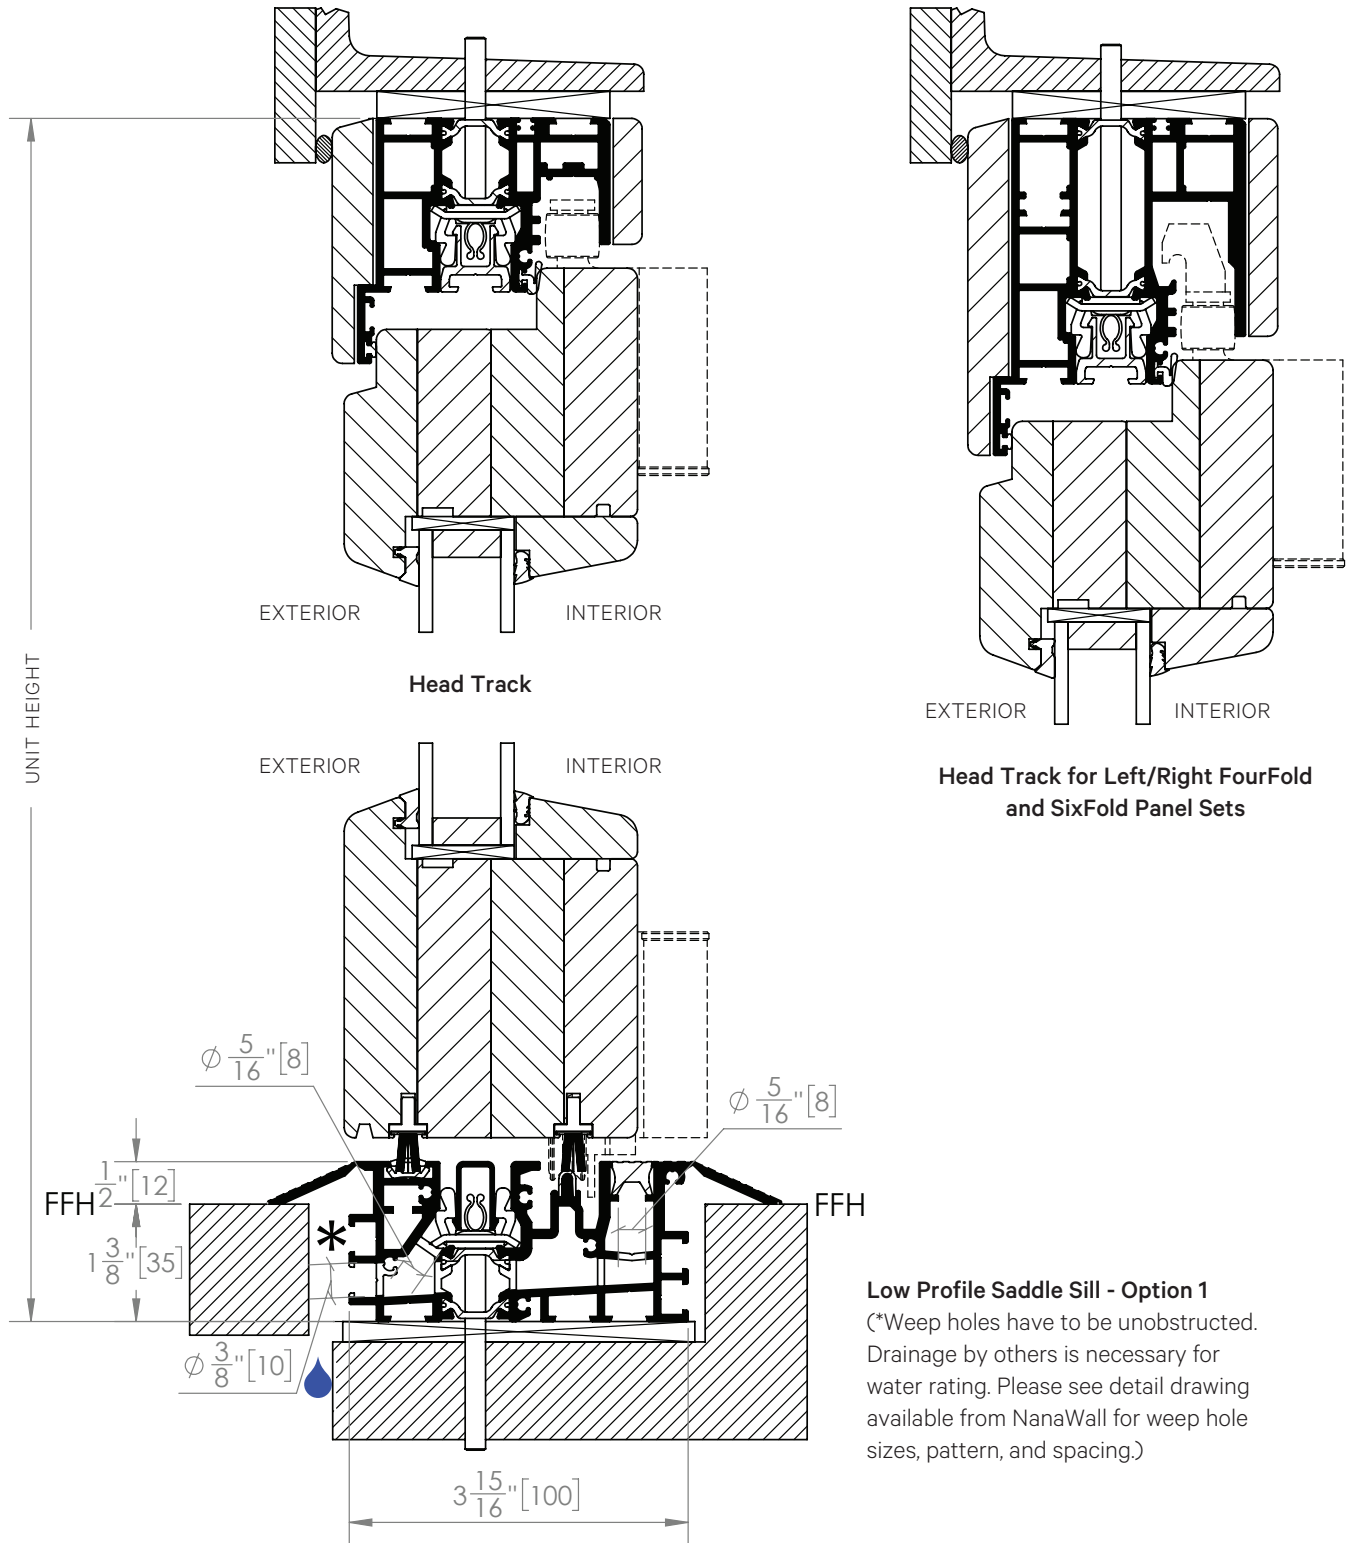

Inward Opening Details

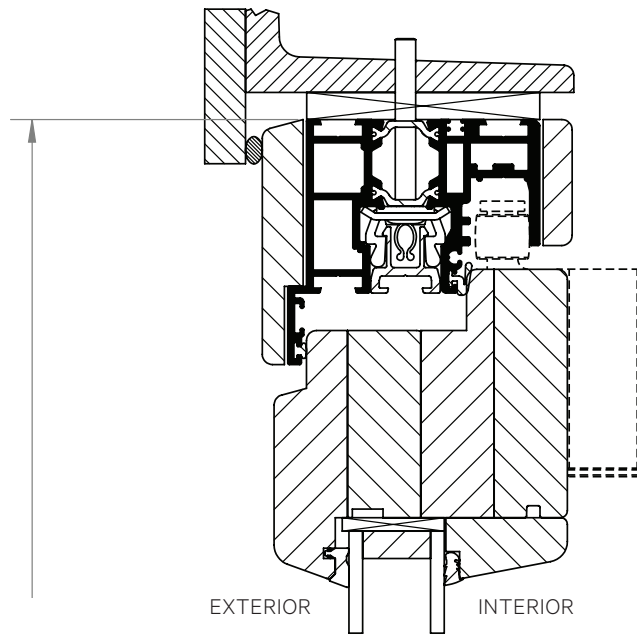


Recessed Head Track

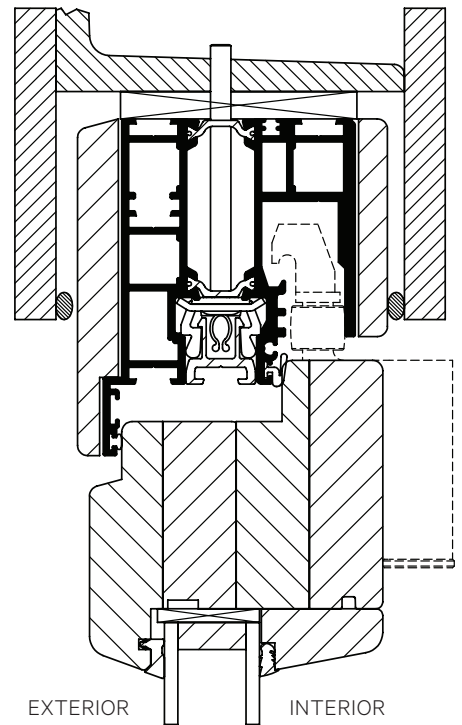

Recessed Head Track for Left/Right FourFold and SixFold Panel Sets


UNIT HEIGHT

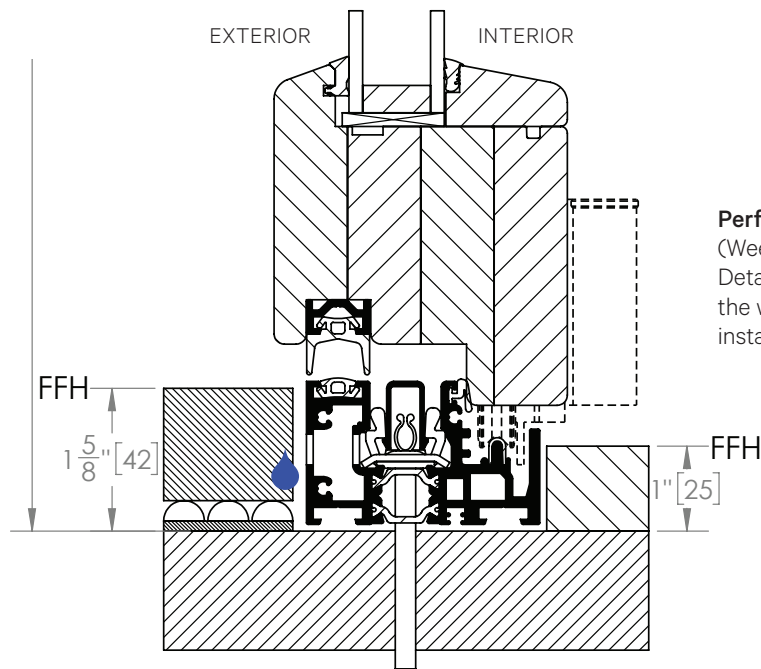



Performance Sill

(Weep slots have to be unobstructed. Details of the management of water exiting the weep slots must be designed and installed by others.)


Inward Opening Details

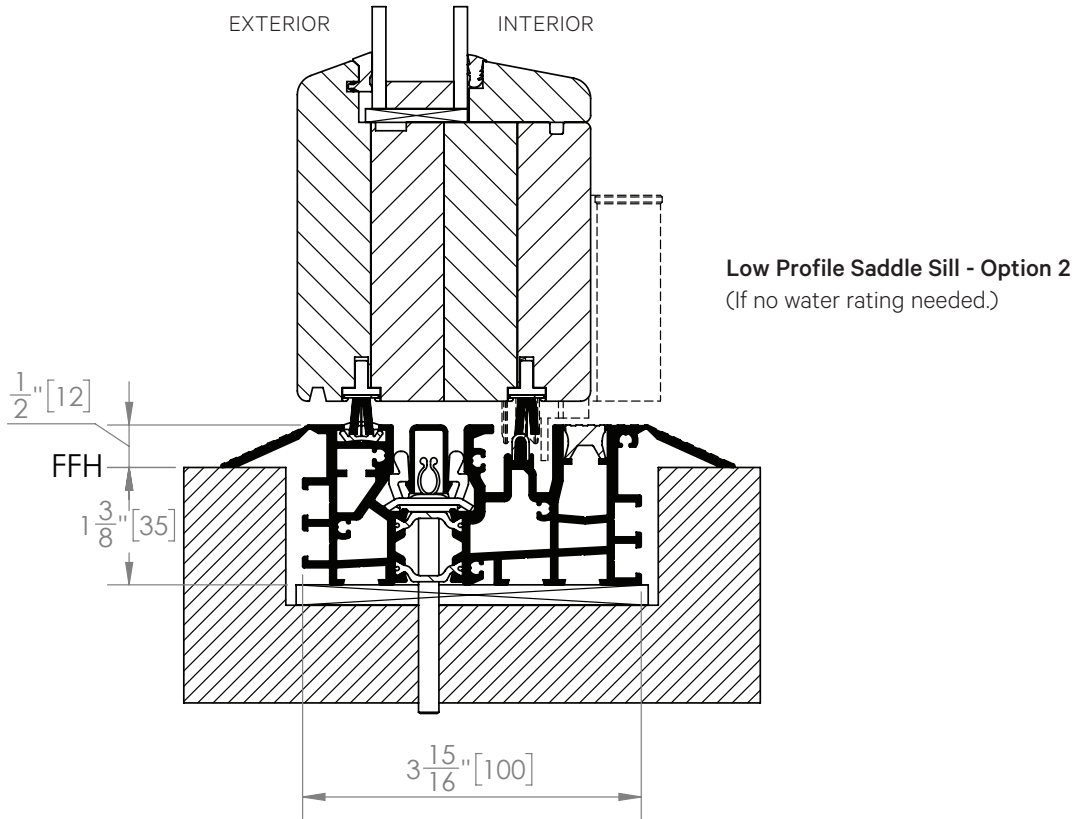


Inward Opening Details

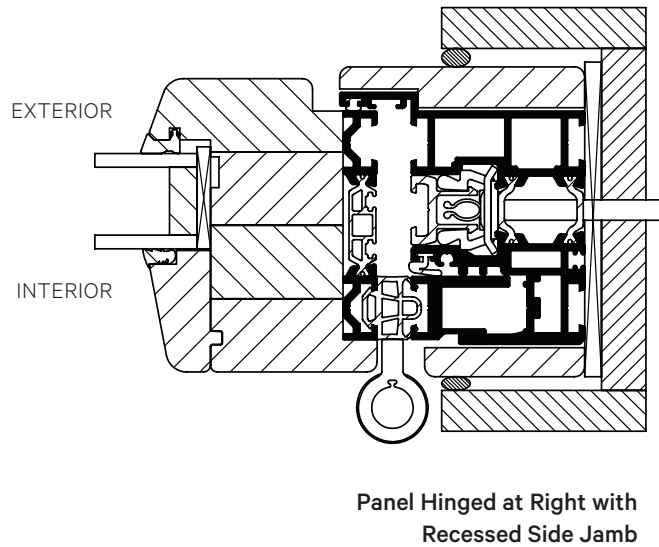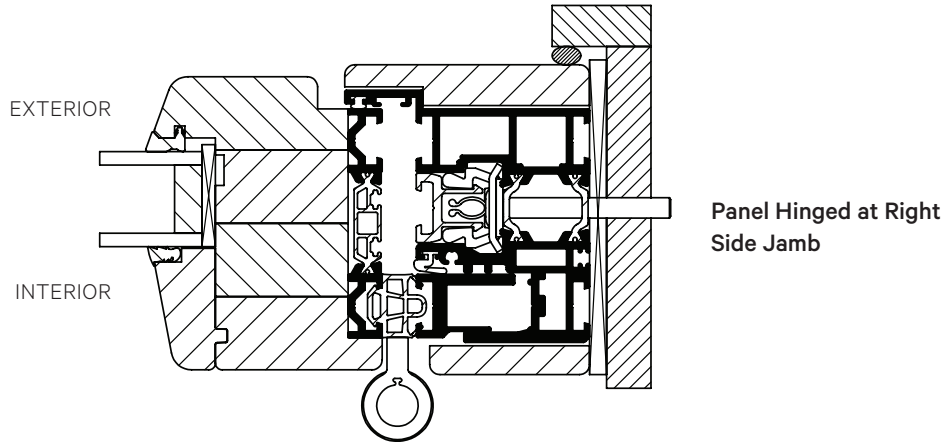


Outward Opening Details

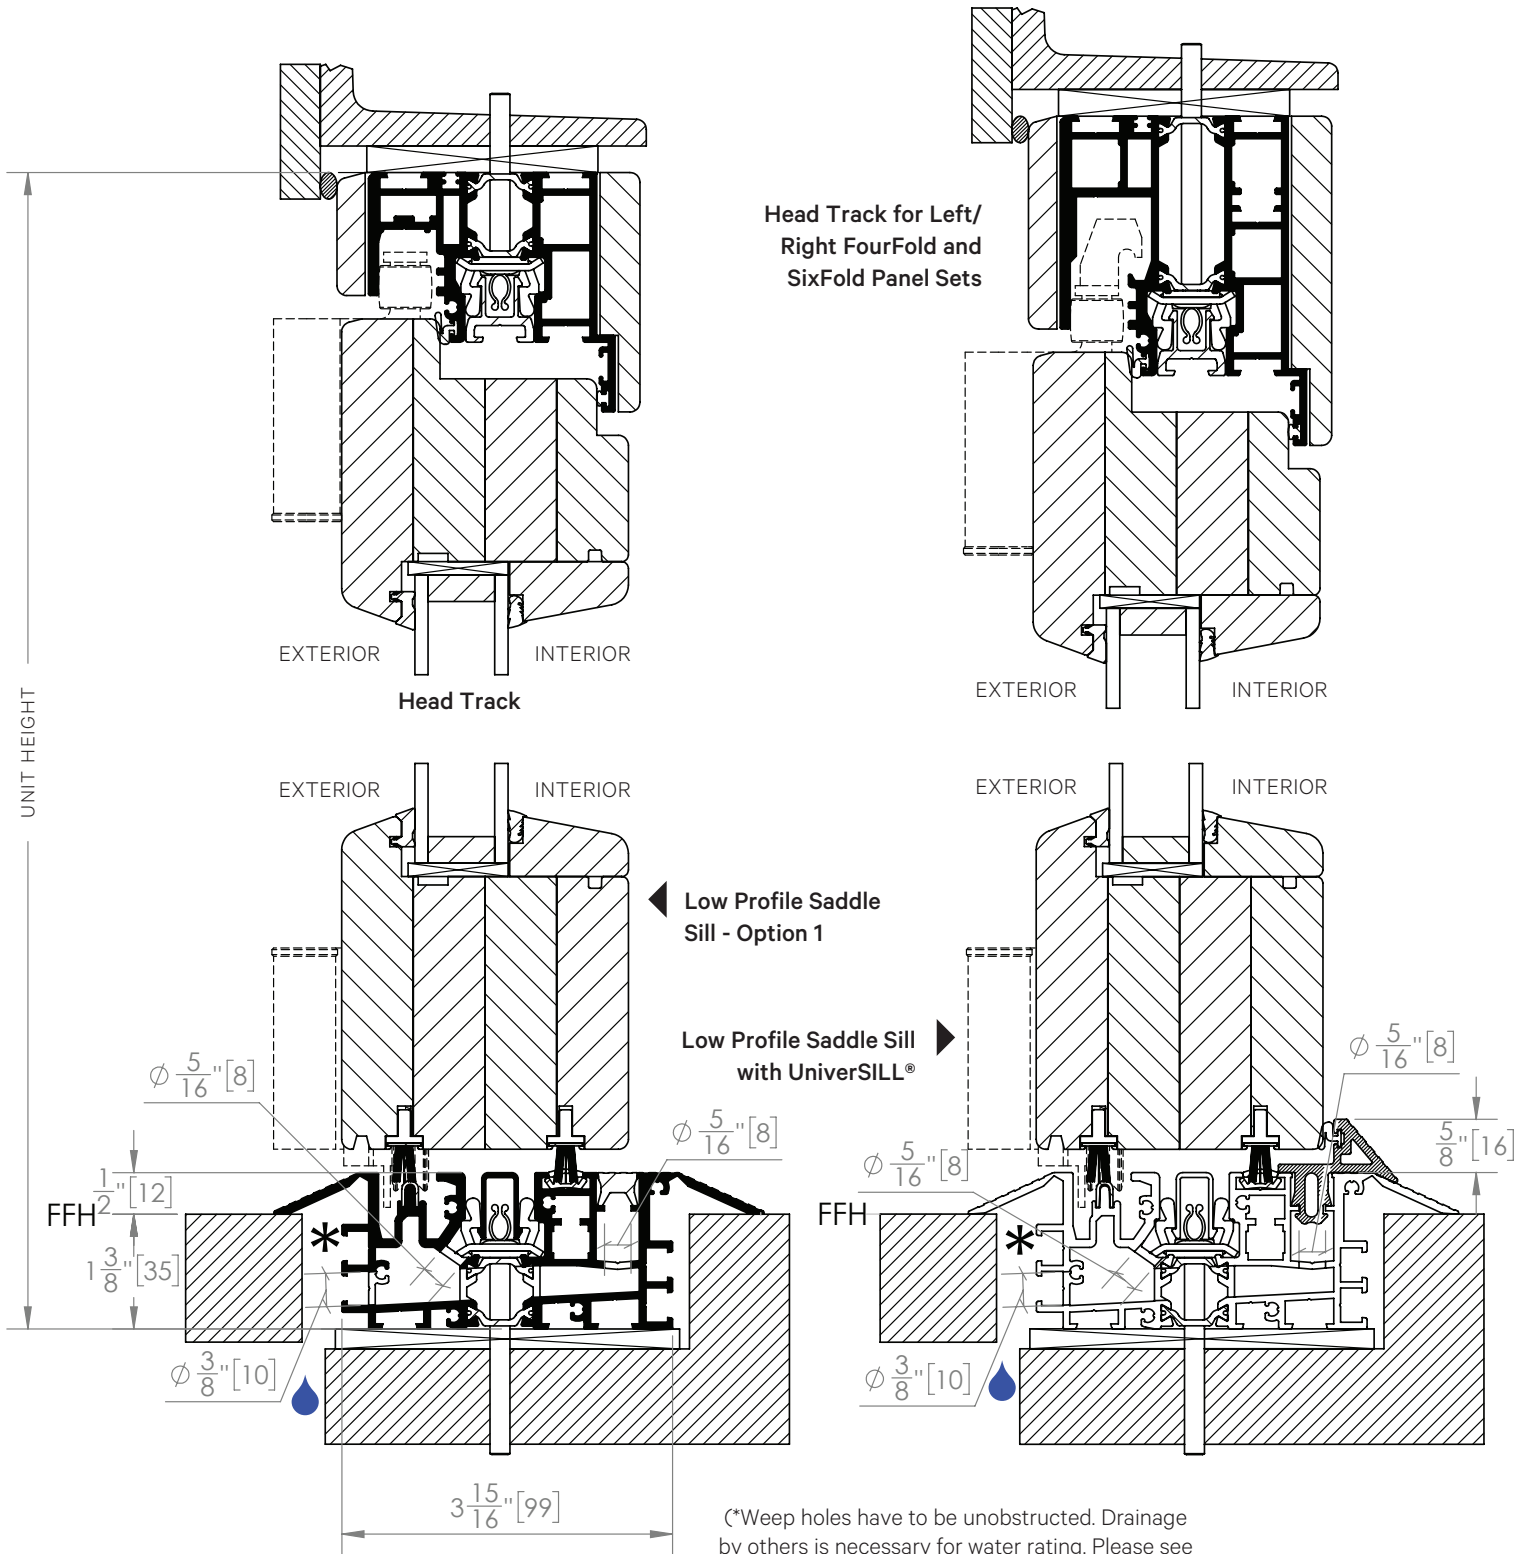


Outward Opening Details

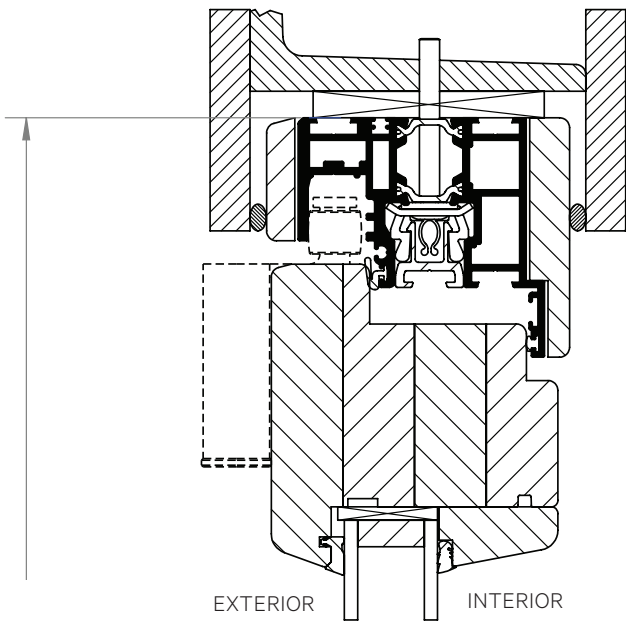

Recessed Head Track

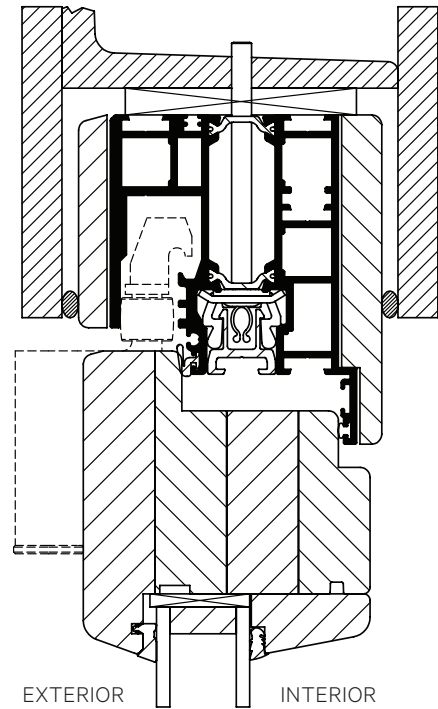


Recessed Head Track for Left/Right FourFold and SixFold Panel Sets

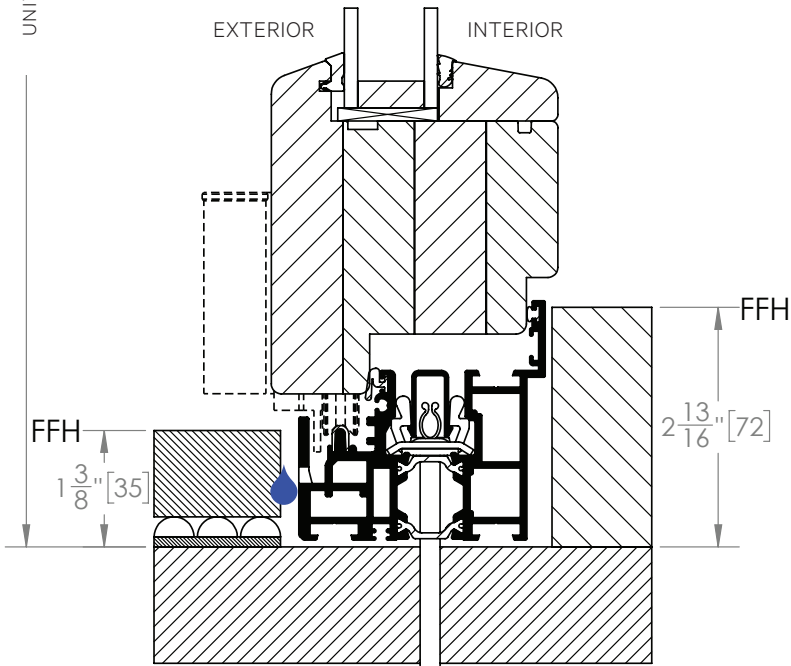


Performance Sill

(Weep slots have to be unobstructed. Details of the management of water exiting the weep slots must be designed and installed by others.)


Outward Opening Details

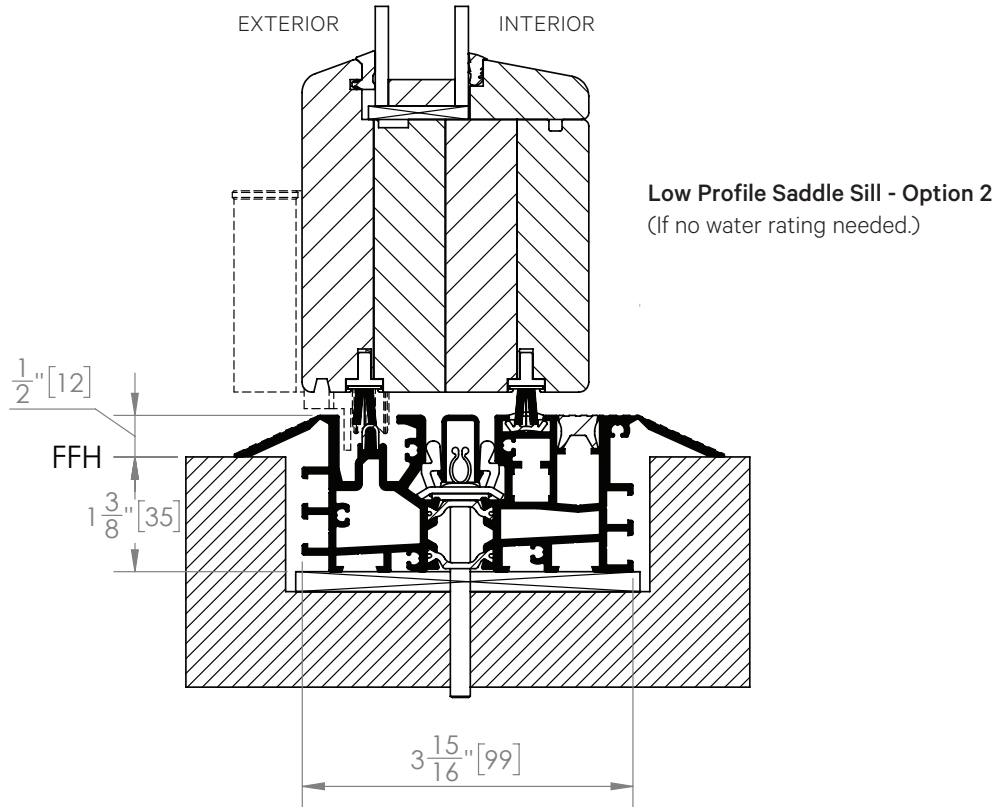

Outward Opening Details

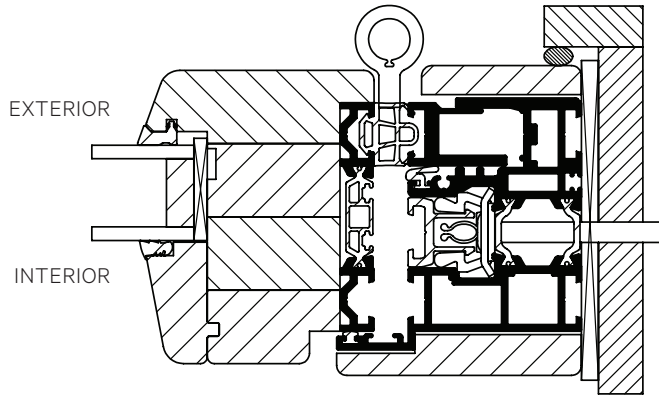

Panel Hinged at Right Side Jamb

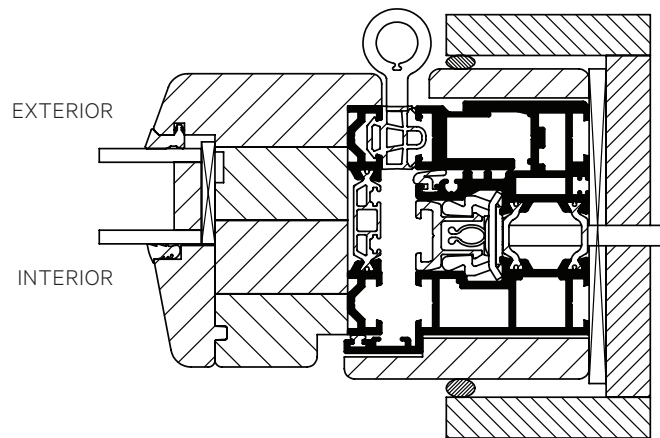

Panel Hinged at Right with Recessed Side Jamb